


General Notes:

- ALL WORK SHALL CONFORM TO THE LATEST FLORIDA BUILDING CODE, THE NFPA LIFE SAFETY CODE, AND ALL OTHER APPLICABLE CODES AND ORDINANCES. OBTAIN ALL REQUIRED PERMITS FOR THE PROPER LEGAL EXECUTION OF THE WORK DESCRIBED IN THESE DRAWINGS AND SPECIFICATIONS.
- PROVIDE A CONTINUOUS LOAD PATH FROM TRUSSES OR RAFTERS TO FOUNDATION FOR ALL NEW CONSTRUCTION. IF ANY DISCREPANCIES, CALL DESIGNER FOR CLARIFICATION BEFORE PROCEEDING.
- THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO STARTING ANY WORK. HE/SHE SHALL NOTIFY THE DESIGNER OF ANY DISCREPANCIES BETWEEN THE CONTRACT DOCUMENTS AND ACTUAL SITE CONDITIONS FOUND DURING OR PRIOR TO DEMOLITION.
- FOUNDATION DESIGN IS BASED ON 2000 PSF STABLE SOIL CONDITIONS.
- PROVIDE TESTING ON SOIL COMPACTION PRIOR TO LAYING STEEL OR POURING CONCRETE. COMPACTION SHOULD ACHIEVE 95% MODIFIED PROCTOR DENSITY.
- PROVIDE ADEQUATE BLOCKING BEHIND ALL WALL MOUNTED FIXTURES
- PROVIDE ALL ACCESSORIES, HARDWARE AND MISC. ITEMS AS PER DRAWINGS AND SPECIFICATIONS. ALL ITEMS SHALL BE INSTALLED AS PER MANUFACTURERS WRITTEN INSTRUCTIONS AND CUT SHEETS.
- CONTRACTOR MUST VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION. DO NOT SCALE DRAWINGS.
- ALL CONCRETE SHALL BE 3000 PSI COMPRESSIVE STRENGTH AT 28 DAYS.
- INSTALL DOORS AND WINDOWS PER MANF. DATA PROVIDED W/ PRODUCT. CENTER UNLESS NOTED
- REFER TO WIND LOAD ANALYSIS FOR NAIL PATTERN AND SCHEDULE AND HOLD DOWN TABLES
- ATTIC VENTED. THE TOTAL NET FREE VENTILATING AREA SHALL NOT BE LESS THAN 1/150 OF THE AREA OF THE SPACE VENTILATED. VENTILATION OPENINGS HAVING A LEAST DIMENSION LARGER THAN 1/4 INCH (6.4 MM) SHALL BE PROVIDED WITH CORROSION-RESISTANT WIRE CLOTH SCREENING, HARDWARE CLOTH, OR SIMILAR MATERIAL WITH OPENINGS HAVING A LEAST DIMENSION OF 1/16 INCH (1.6 MM) MINIMUM AND 1/4 INCH (6.4 MM) MAXIMUM.
- ALL FLASHING TO MEET CODES. FOLLOW MANUFACTURER'S DATA SHEET AND SMACNA STANDARDS.
- STRUCTURAL CONNECTORS LISTED ARE FOR EXAMPLE. OTHER PRODUCTS MAY BE SUBSTITUTED FOR ANY CONNECTORS LISTED PROVIDED THEY MEET THE REQUIRED LOAD CAPACITIES. FOLLOW MANUFACTURER'S INSTALLATION DATA. ANY CONNECTORS EXPOSED TO THE WEATHER SHALL BE HOT DIPPED GALVANIZED.
- ANCHOR BOLT MINIMUM EMBEDMENT IS 7" UNLESS OTHERWISE NOTED.
- ELECTRICAL INFORMATION IS DIAGRAMMATIC ONLY.
- ALL FIXTURES AND EQUIPMENT MUST MEET THE OWNER'S APPROVAL PRIOR TO PURCHASE AND INSTALLATION
- ALL WOOD IN CONTACT WITH MASONRY OR CONCRETE SHALL BE PRESSURE TREATED. ALL STRUCTURAL WOOD EXPOSED TO WEATHER SHALL BE PRESSURE TREATED.
- ALL WOOD AND WOOD CONSTRUCTION SHALL COMPLY WITH THE RELEVANT CODES AND SPECIFICATIONS AND THE 'AMERICAN INSTITUTE OF TIMBER CONSTRUCTION' (STANDARD MANUAL.)
- APPLICATION OF PAINT OR OTHER COATING SHALL BE IN STRICT ACCORDANCE WITH THE MANUFACTURER'S DIRECTIONS. READY-MIXED PAINT SHALL NOT BE THINNED, EXCEPT AS PERMITTED IN THE APPLICATION INSTRUCTIONS.
- ALL SURFACES TO BE FINISHED SHALL BE CLEAN AND FREE OF FOREIGN MATERIALS, (DIRT, GREASE, ASPHALT, RUST, ETC.)
- APPLICATION SHALL BE IN A WORKMANLIKE MANNER PROVIDING A SMOOTH SURFACE. APPLICATION RATE SHALL BE THAT RECOMMENDED BY THE MANUFACTURER. APPLICATION MAY BE BY BRUSH OR ROLLER, OR MAY BE BY SPRAY IF PAINT IS FORMULATED FOR SAME.
- PROVIDE EXTERIOR AND INTERIOR SURFACE FINISHES AS SCHEDULED, AS APPROPRIATE FOR THEIR LOCATION OR EXPOSURE TO WEATHER, AND AS RECOMMENDED BY THE MANUFACTURER.
- OTHER FINISHES AS PER CONSTRUCTION DOCUMENTS, FINISH SCHEDULE OR OWNER'S SPECIFICATIONS.
- THE DESIGNER SHALL NOT BE RESPONSIBLE FOR AND WILL NOT HAVE CONTROL OR CHARGE OF CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES OR PROCEDURES. NOR WILL HE/SHE BE RESPONSIBLE FOR THE SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK, OR THE CONTRACTOR'S FAILURE TO CARRY OUT THE WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS. THE DESIGNER SHALL NOT BE RESPONSIBLE FOR OR HAVE CONTROL OR CHARGE OVER THE ACTS OR OMISSIONS OF THE CONTRACTOR, SUB-CONTRACTORS, OR ANY OF THEIR AGENTS OR EMPLOYEES, OR ANY OTHER PERSONS PERFORMING ANY OF THE WORK.

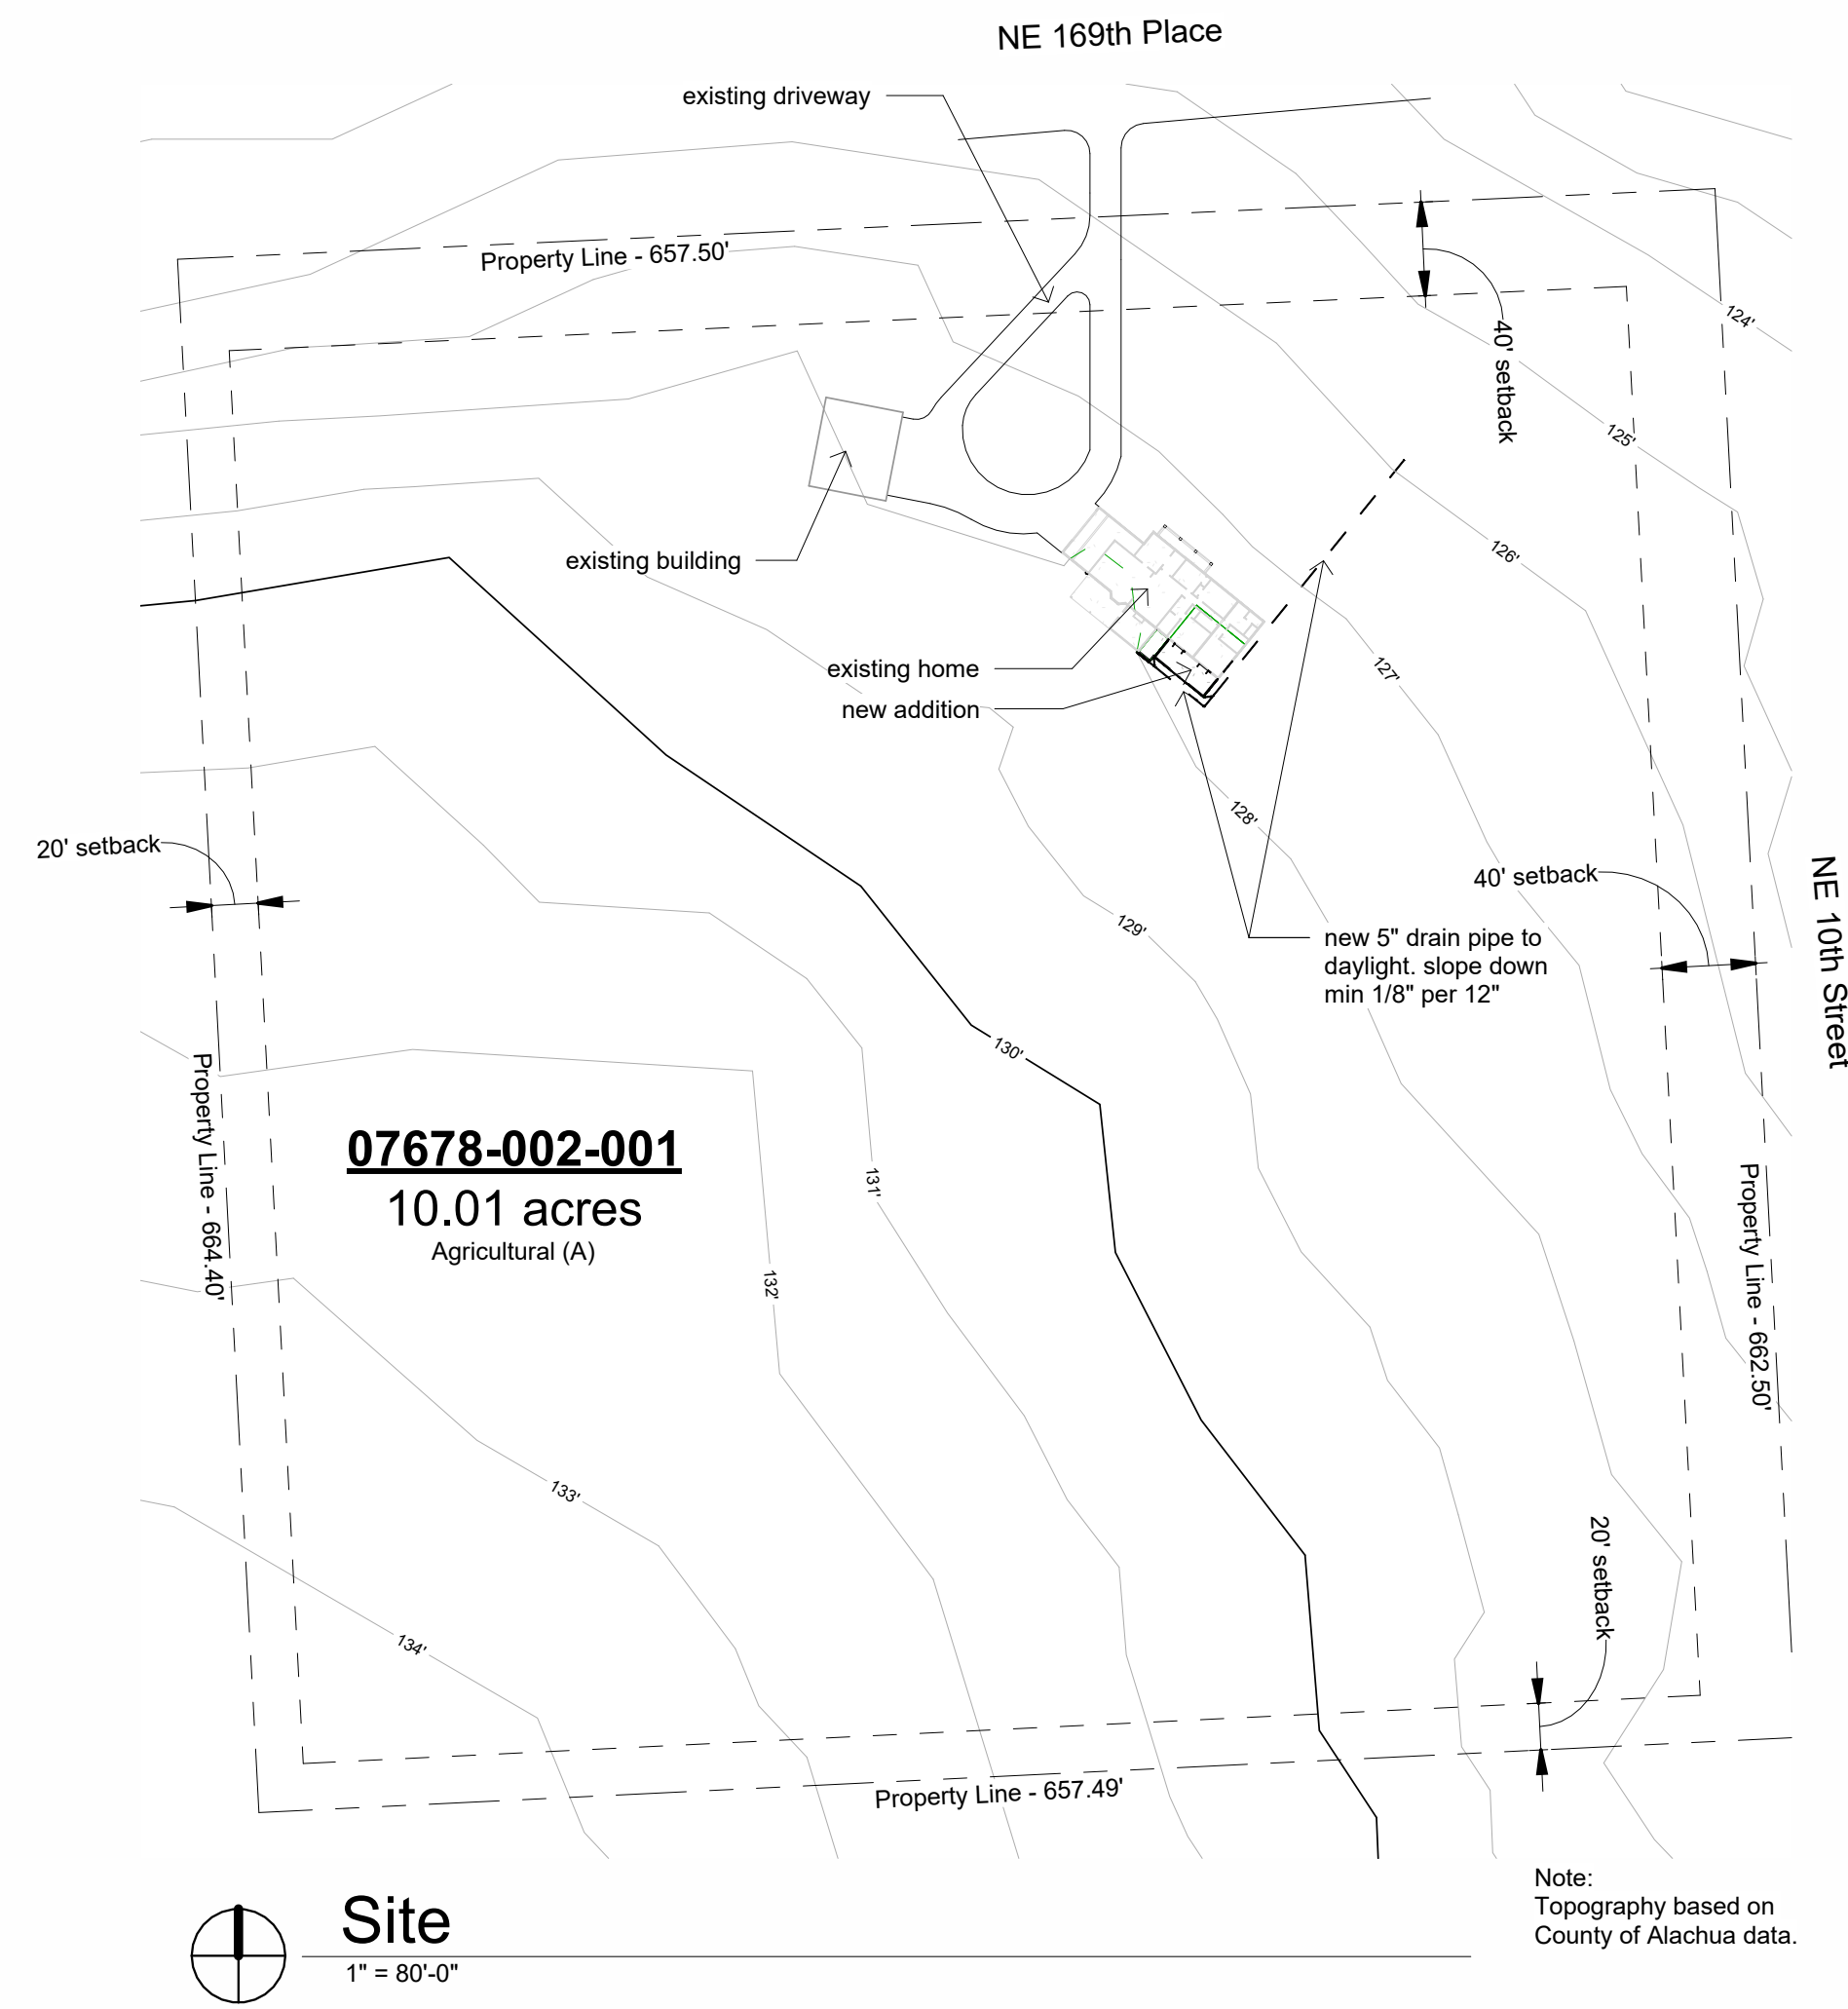

Project Identification
Logan Residence

Project Location
16910 NE 10th Street
Gainesville, Florida 32609

Owner
Allison Logan


Designer
Bob Harris - dba Bob Harris Design
2351 SW 56th Avenue
Gainesville, Florida 32608

Building Code
All areas of construction shall comply with Florida Building Code 8th Addition 2023

Project Scope
New Addition to Existing Home

Sheet List	
Sheet Number	Sheet Name
A0	Cover, Location, Notes
A1	Floor Plan
A2	Elevations
A3	Roof & Foundation Plan Plan
A4	Details

Area Schedule (Gross Building)	
Area	Type
2070 SF	Existing Conditioned
277 SF	New Conditioned
2347 SF	

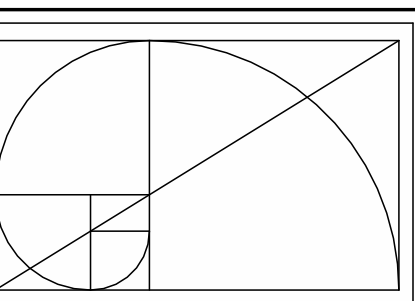

BOB HARRIS DESIGN

bobharrisdesign.com
bh@bobharrisdesign.com
352-317-6644
2351 SW 5th Avenue

CLIENT
Allison Logan

**Logan Residence
Sunroom Addition**
16910 NE 10th Street
Gainesville, Florida 32609


Revision Date
Number Date

Date:
04/10/2024

Drawn:
Bob Harris

Description:
Cover, Location, Notes


SHEET
A0
OF
5

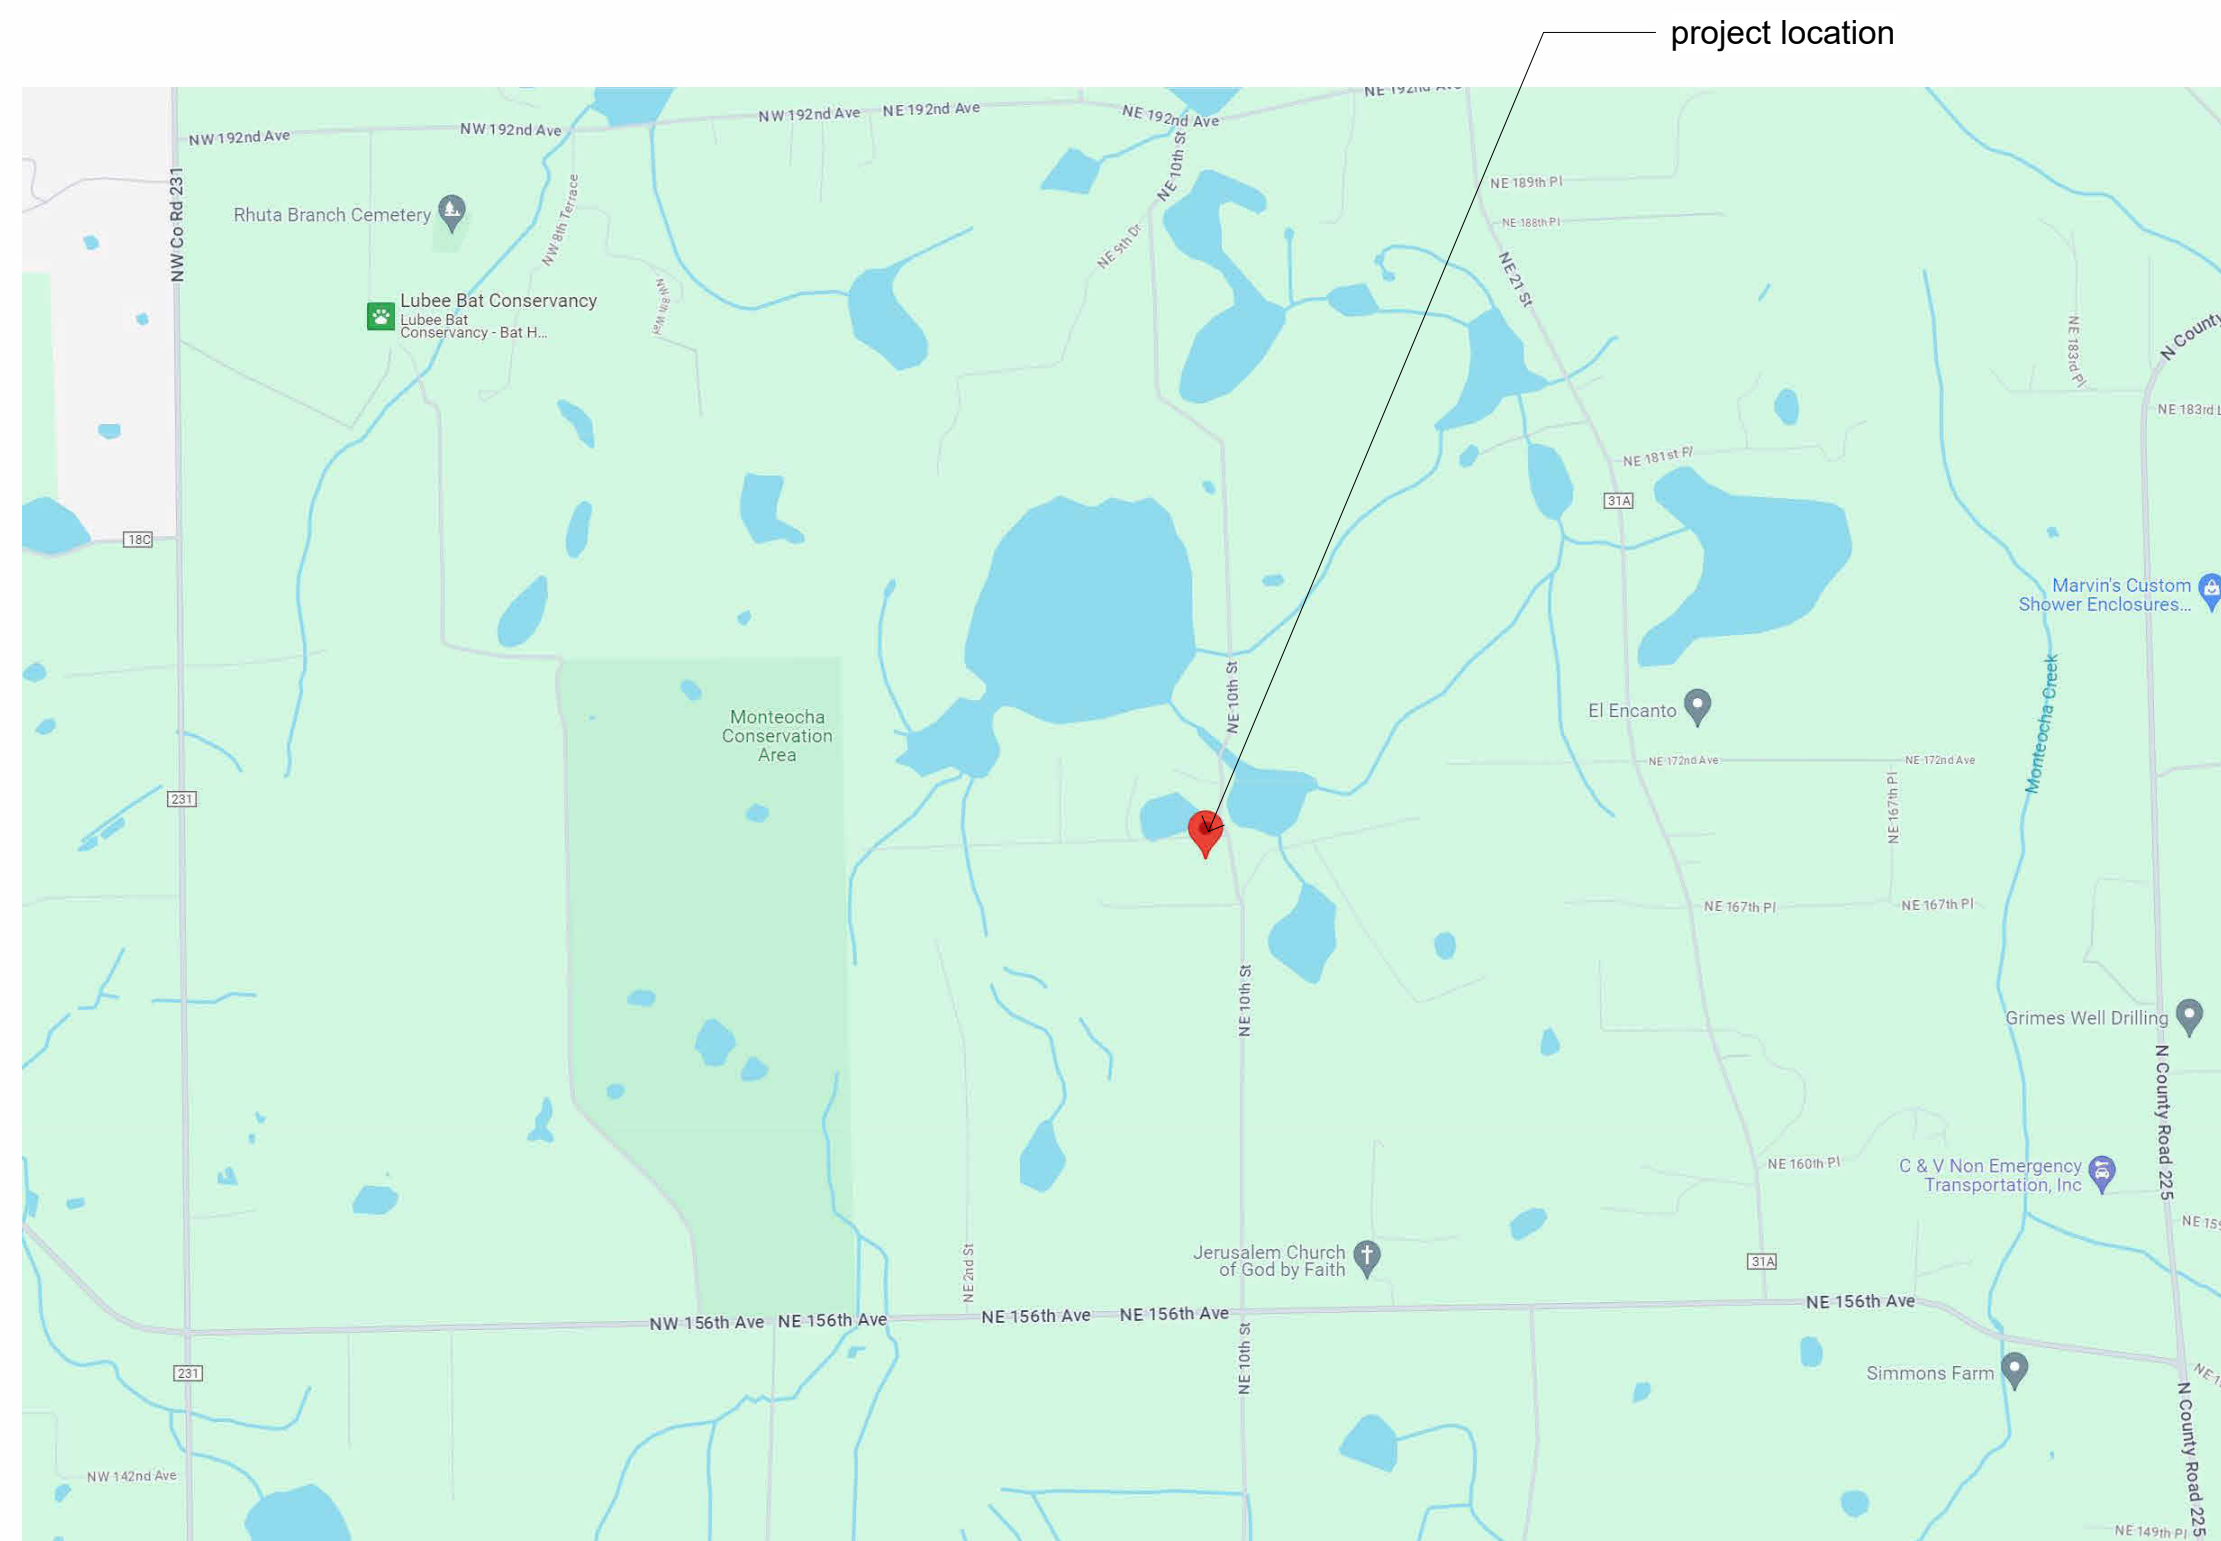


Location Map
N.T.S.



Sketch 1

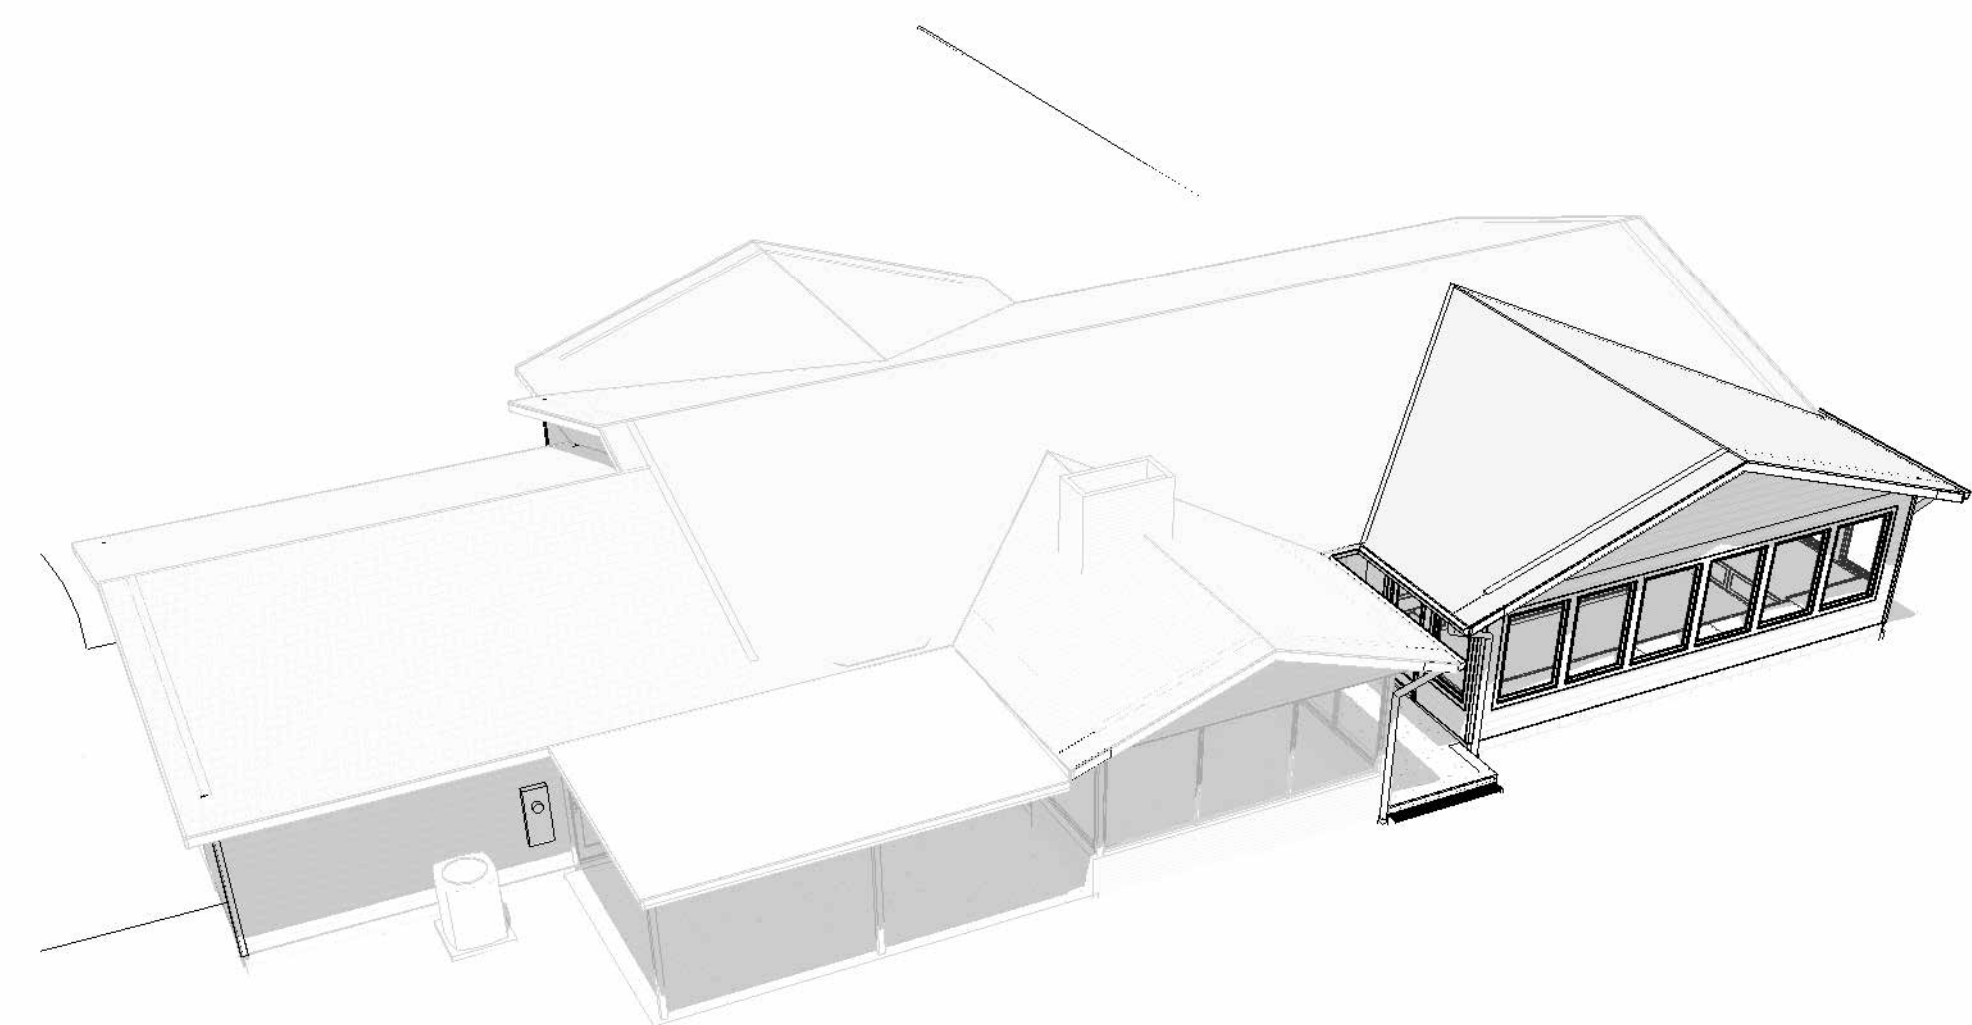

Sketch 2

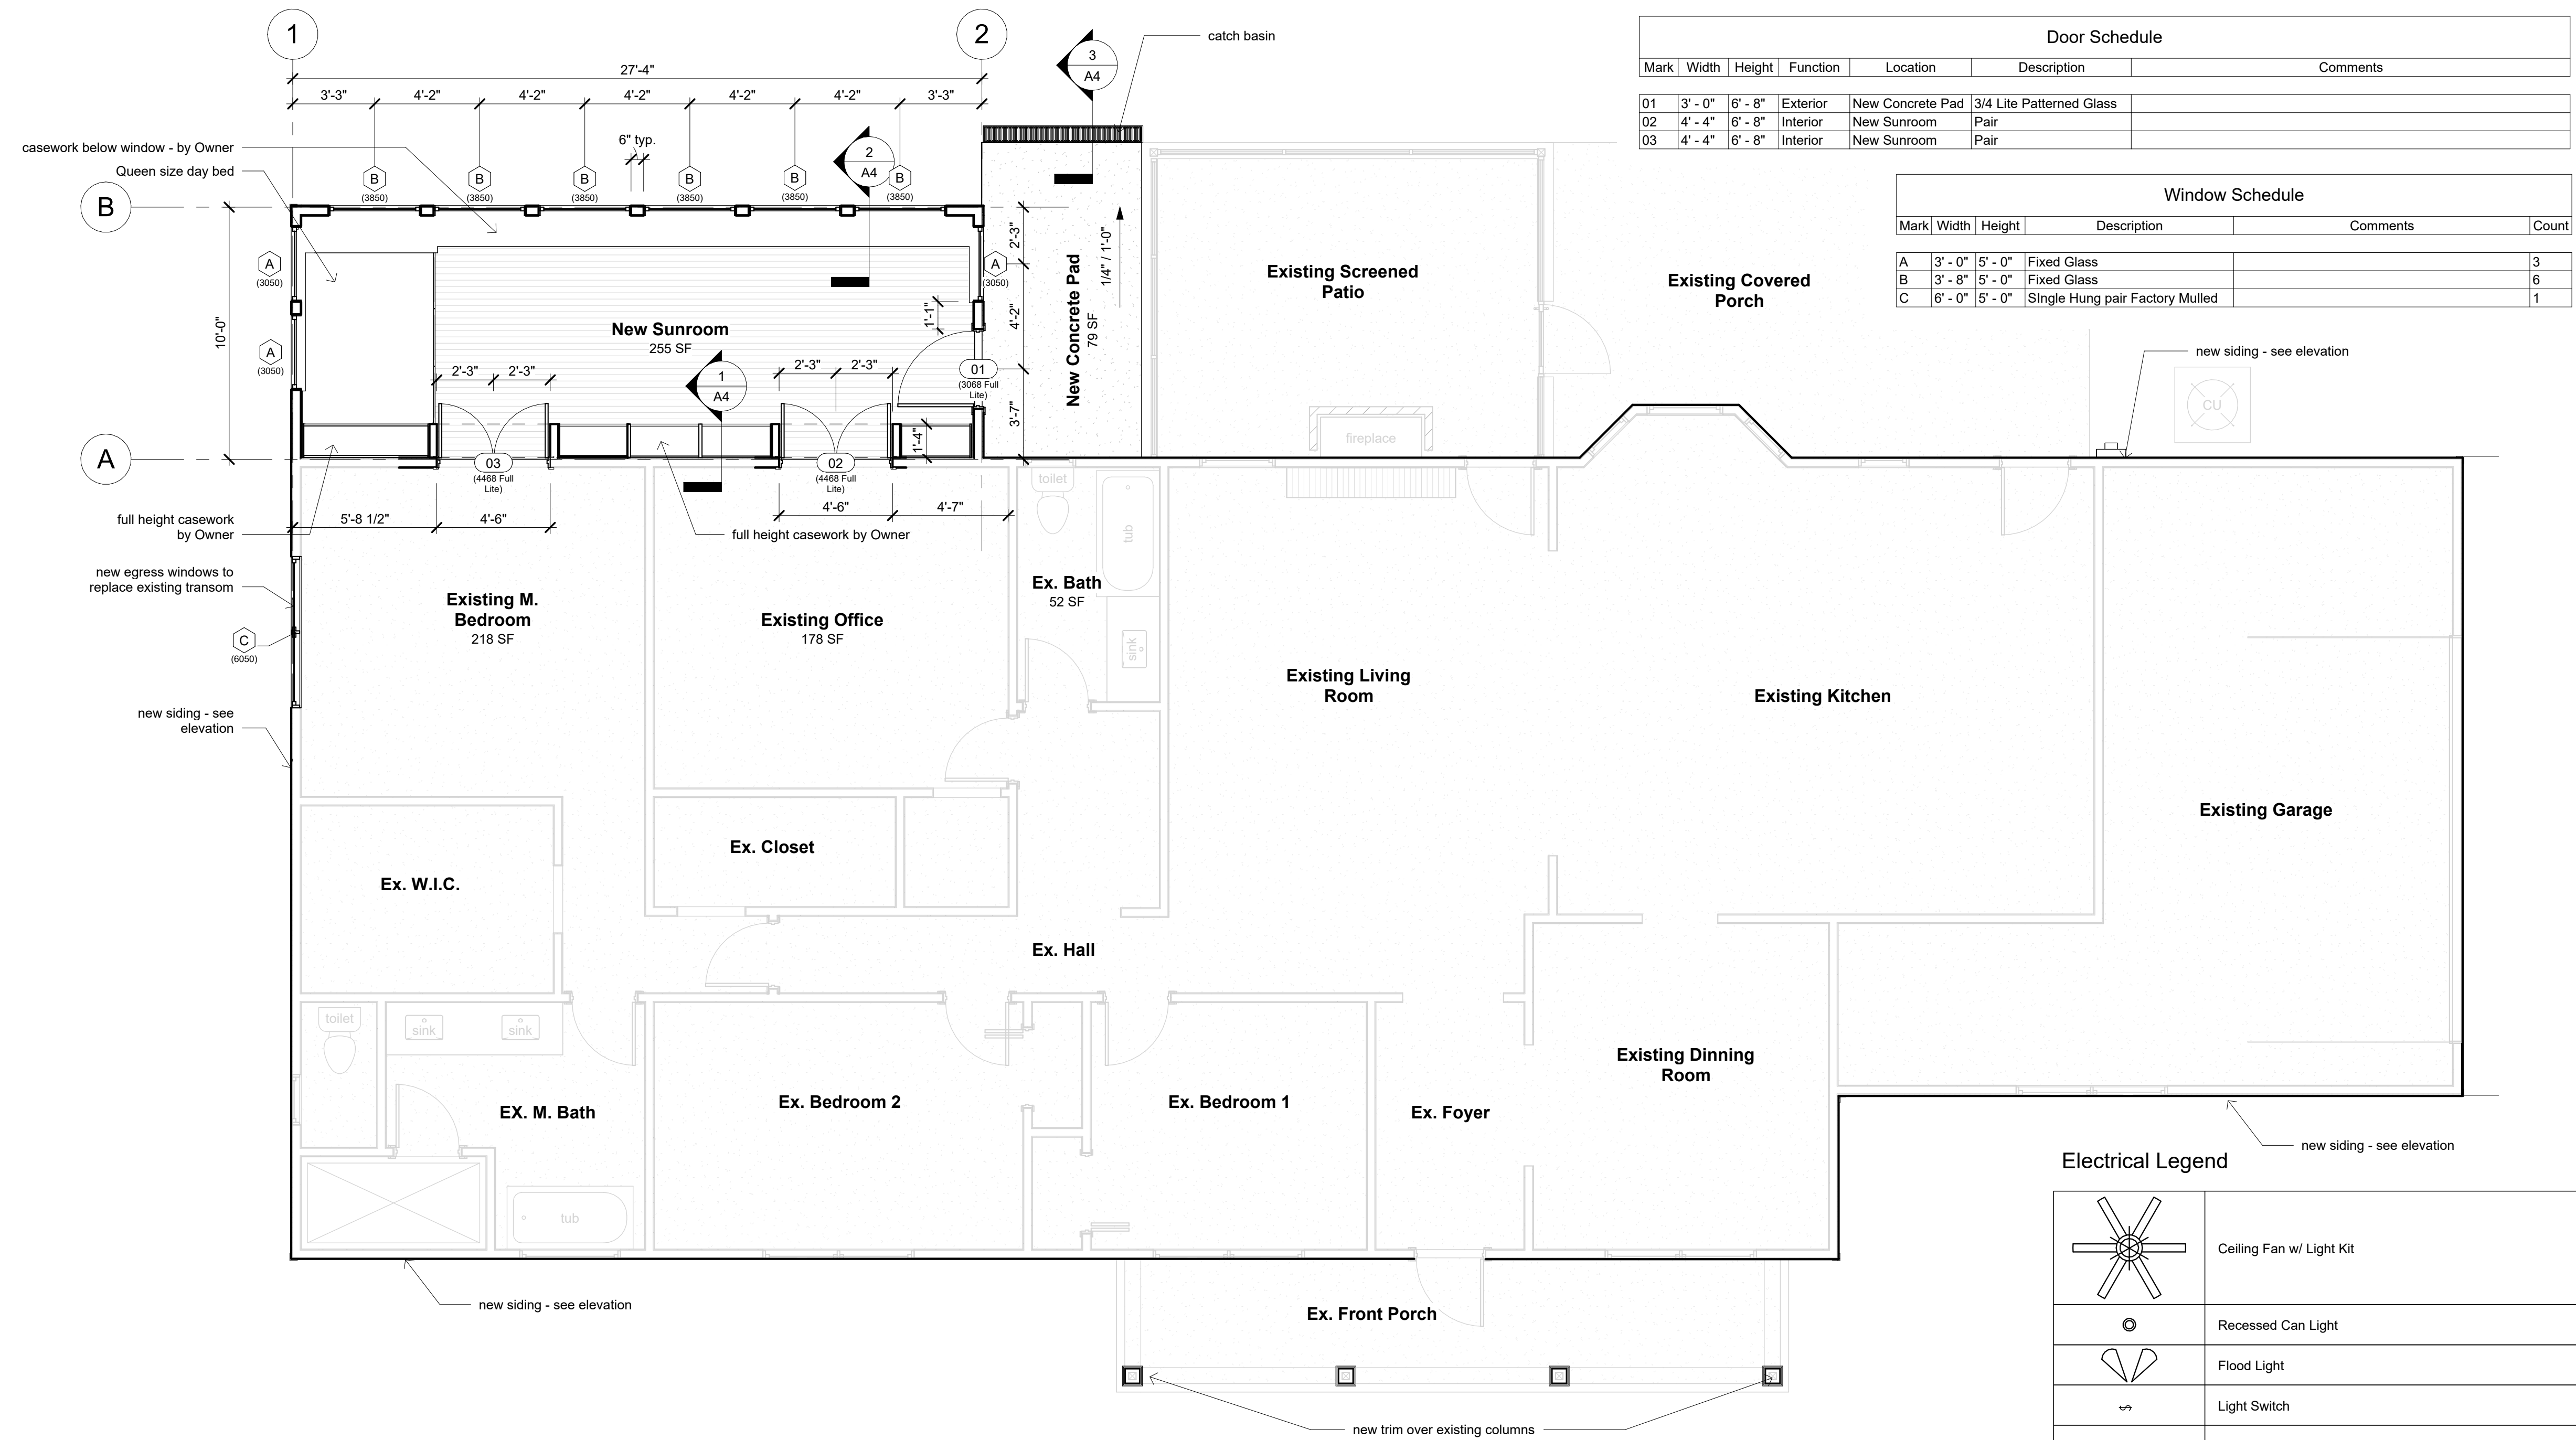


Door Schedule						
Mark	Width	Height	Function	Location	Description	Comments
01	3'-0"	6'-8"	Exterior	New Concrete Pad	3/4 Lite Patterned Glass	
02	4'-4"	6'-8"	Interior	New Sunroom	Pair	
03	4'-4"	6'-8"	Interior	New Sunroom	Pair	

Window Schedule					
Mark	Width	Height	Description	Comments	Count
A	3'-0"	5'-0"	Fixed Glass		3
B	3'-8"	5'-0"	Fixed Glass		6
C	6'-0"	5'-0"	Single Hung pair Factory Muller		1


Floor Plan
1/4" = 1'-0"

Electrical Legend	
	Ceiling Fan w/ Light Kit
	Recessed Can Light
	Flood Light
	Light Switch
	3 Way Light Switch
	120V Duplex - Number indicates height above floor
	120V Duplex - Ground Fault Interrupted
	120V Duplex - Ground Fault Interrupted In Water Resistant Enclosure

- Electrical General Notes:**
- All receptacle outlets not indicated as gfi (ground fault interrupted) shall be afci (arc fault circuit interrupted)
 - All receptacle outlets indicated as WP are Ground Fault Interrupted
 - Verify w/ Owner light all other fixtures to receive dimmers

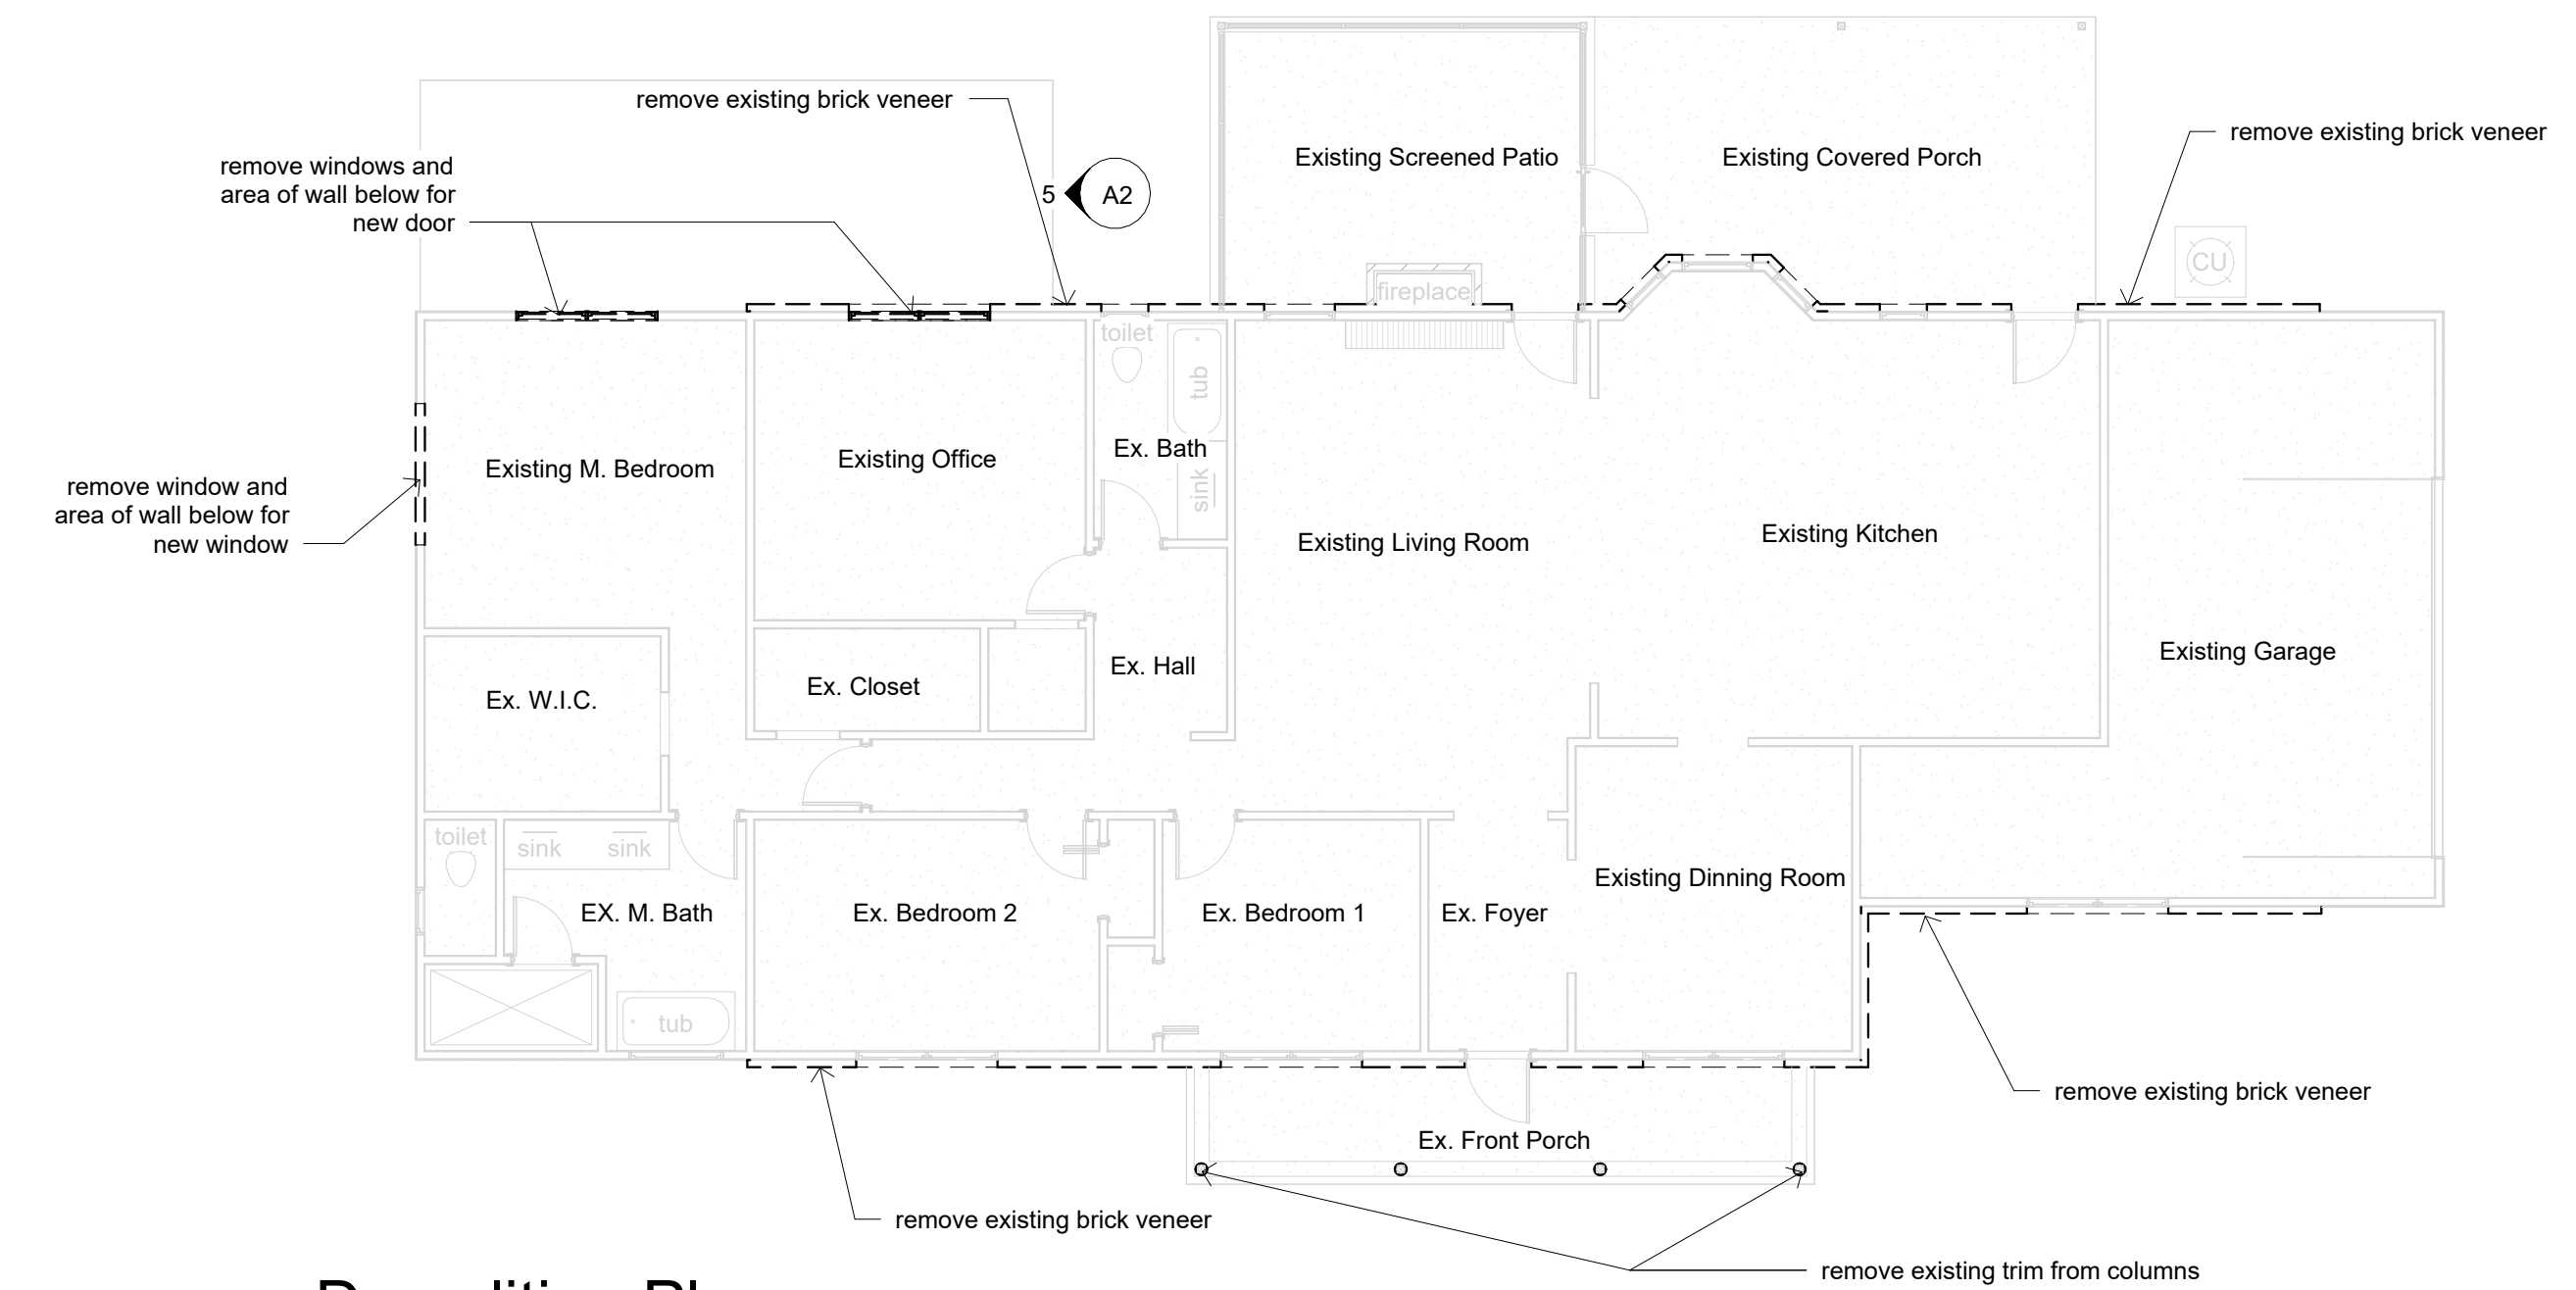

Demolition Plan
1/8" = 1'-0"

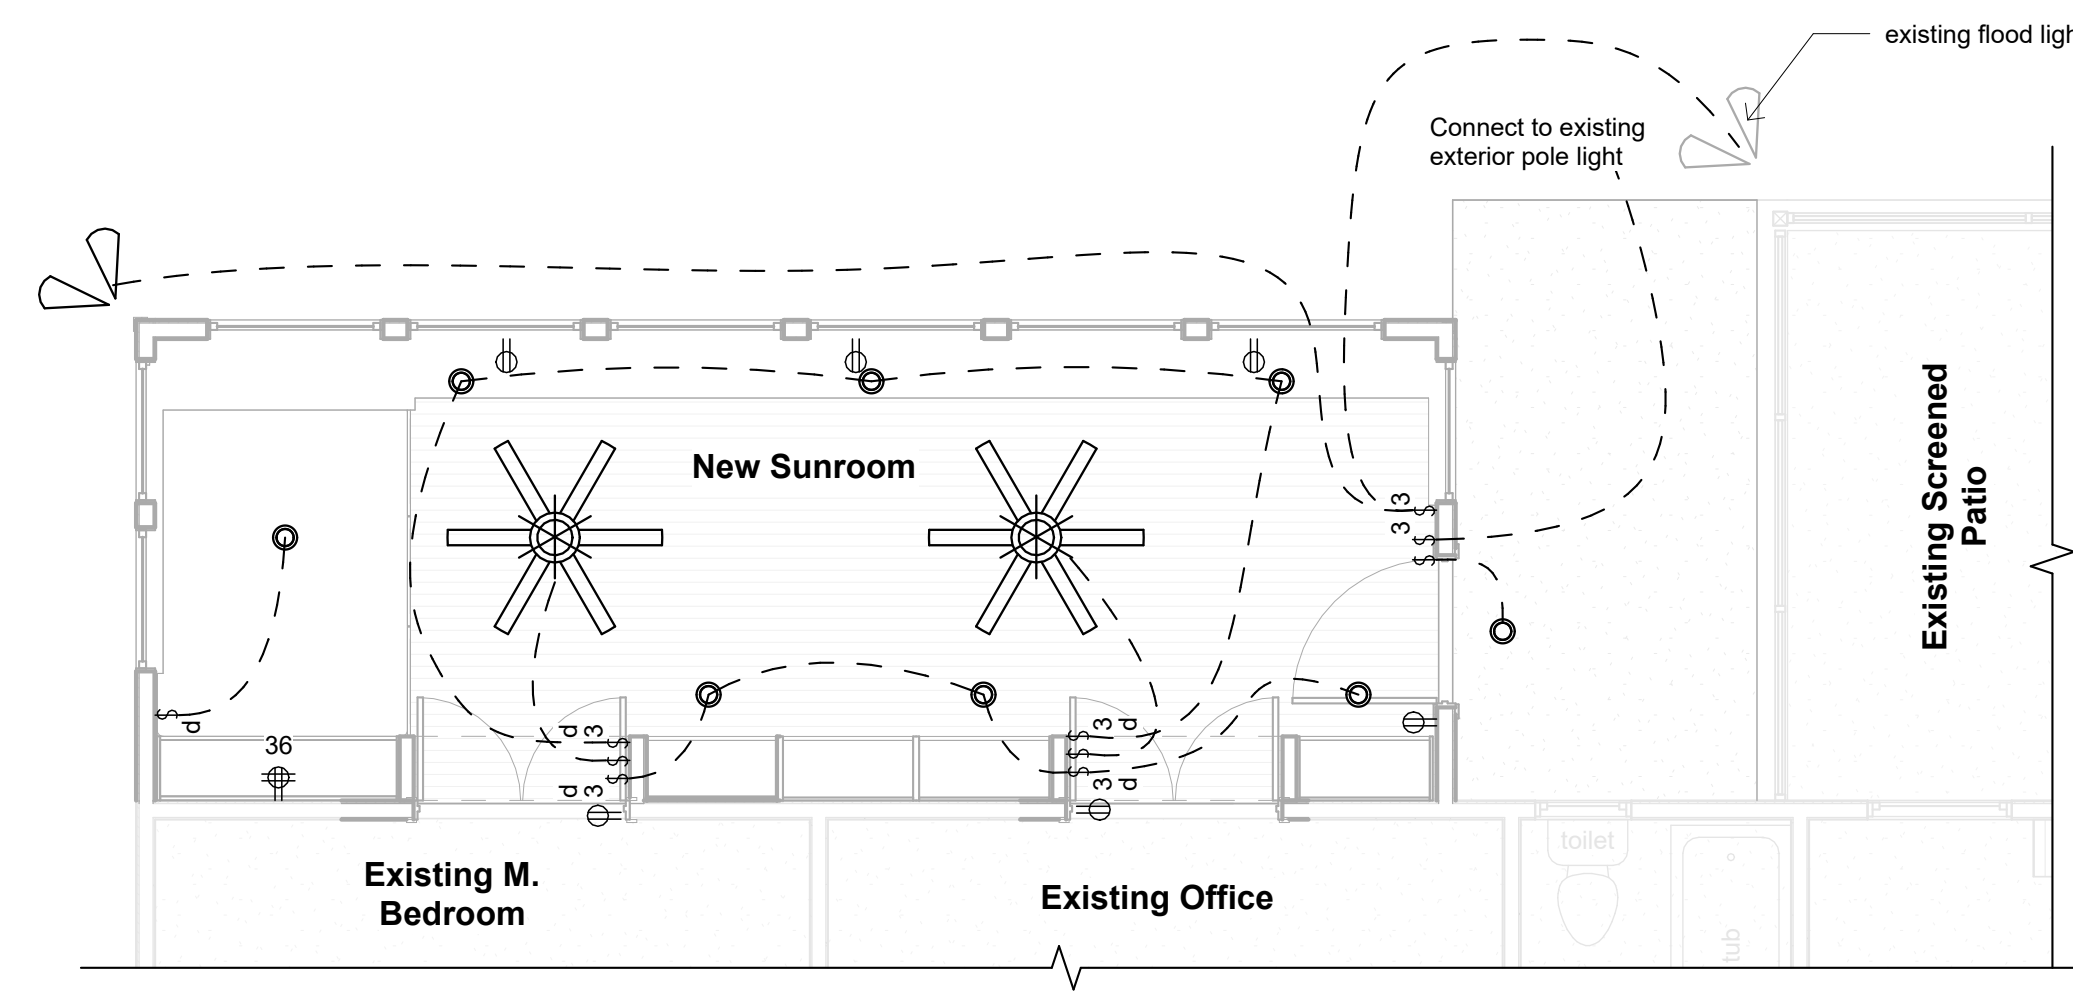

Electrical Plan
1/4" = 1'-0"


BOB HARRIS DESIGN
bobharrisdesign.com
bh@bobharrisdesign.com
352-317-6644
2351 SW 5th Avenue

CLIENT
Allison Logan

Logan Residence
Sunroom Addition
16910 NE 10th Street
Gainesville, Florida 32609


Revision Date	
Number	Date
Date:	04/10/2024
Drawn:	Bob Harris
Description:	Floor Plan

SHEET
A1
OF
5

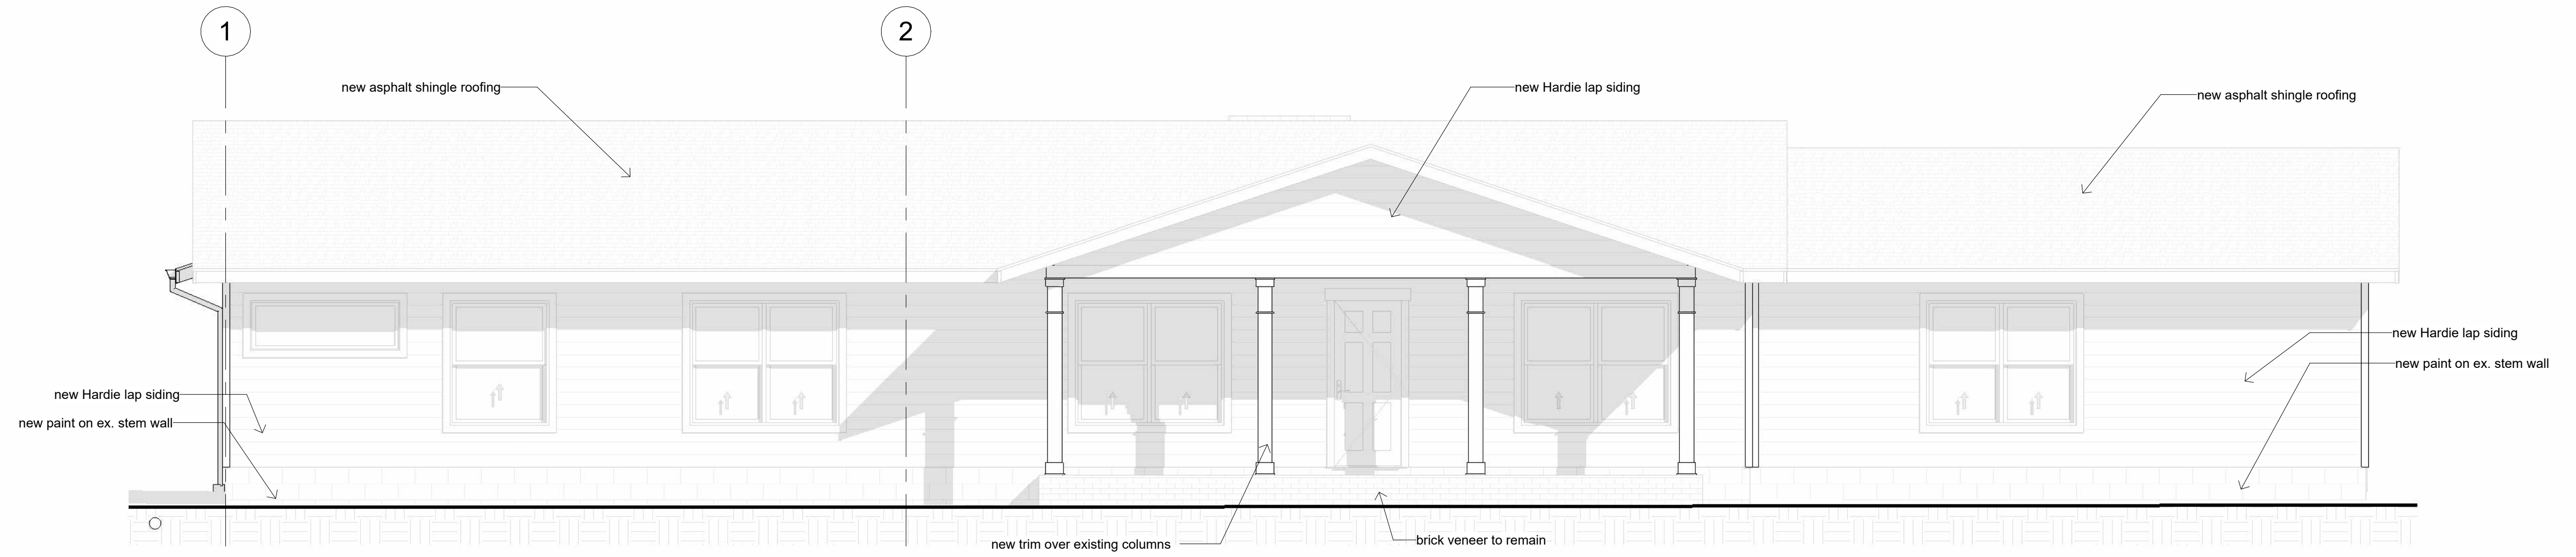

Northwest Elevation

1/4" = 1'-0"

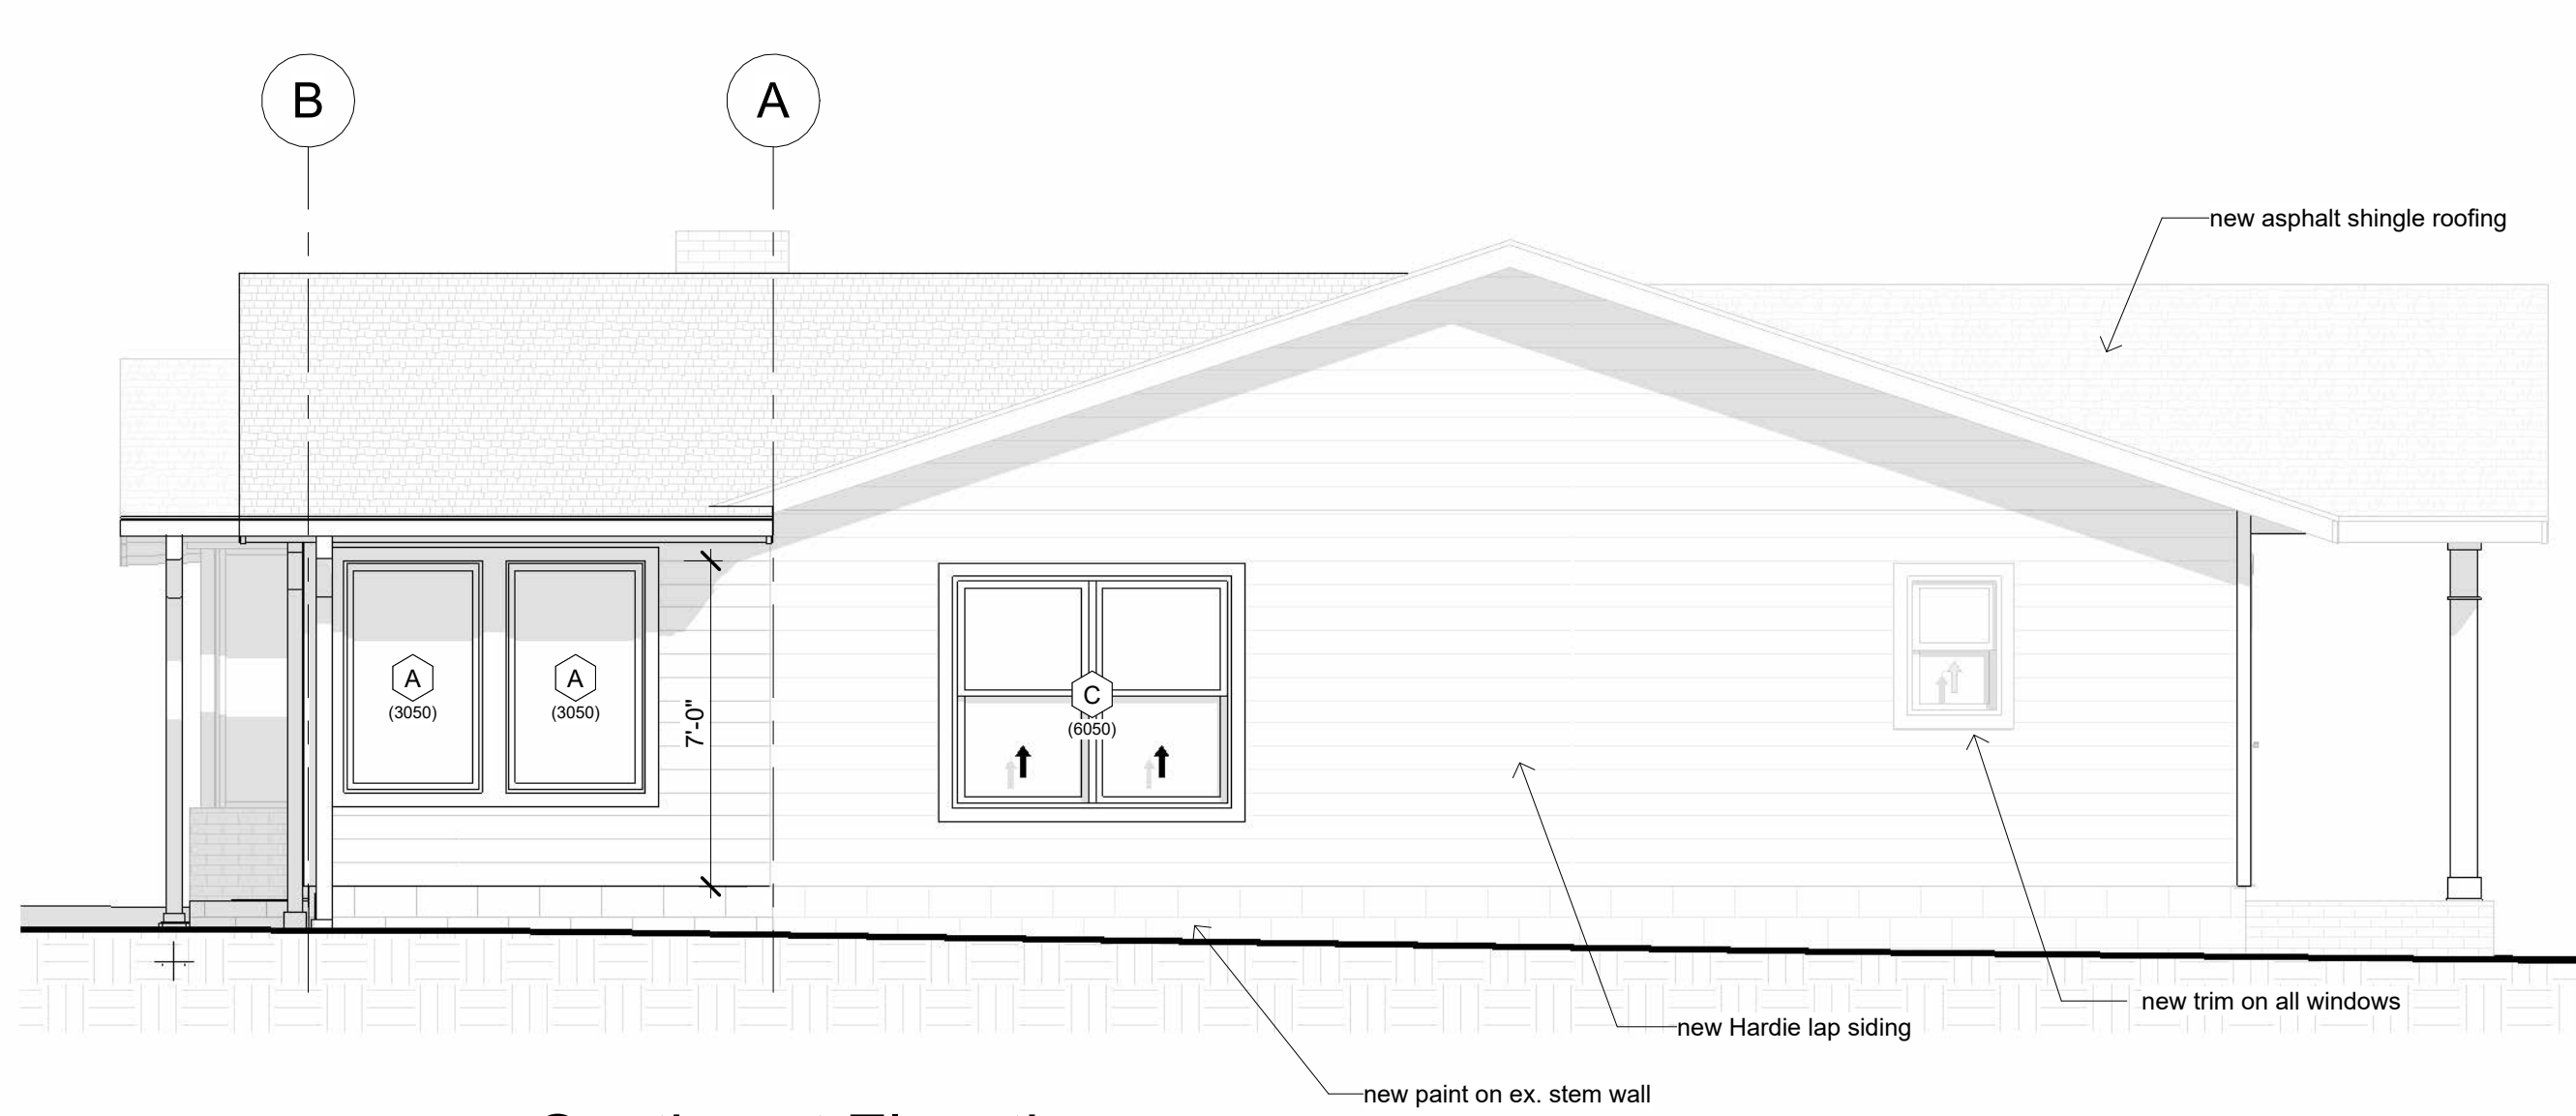


Southeast Elevation

1/4" = 1'-0"




Northeast Elevation

1/4" = 1'-0"

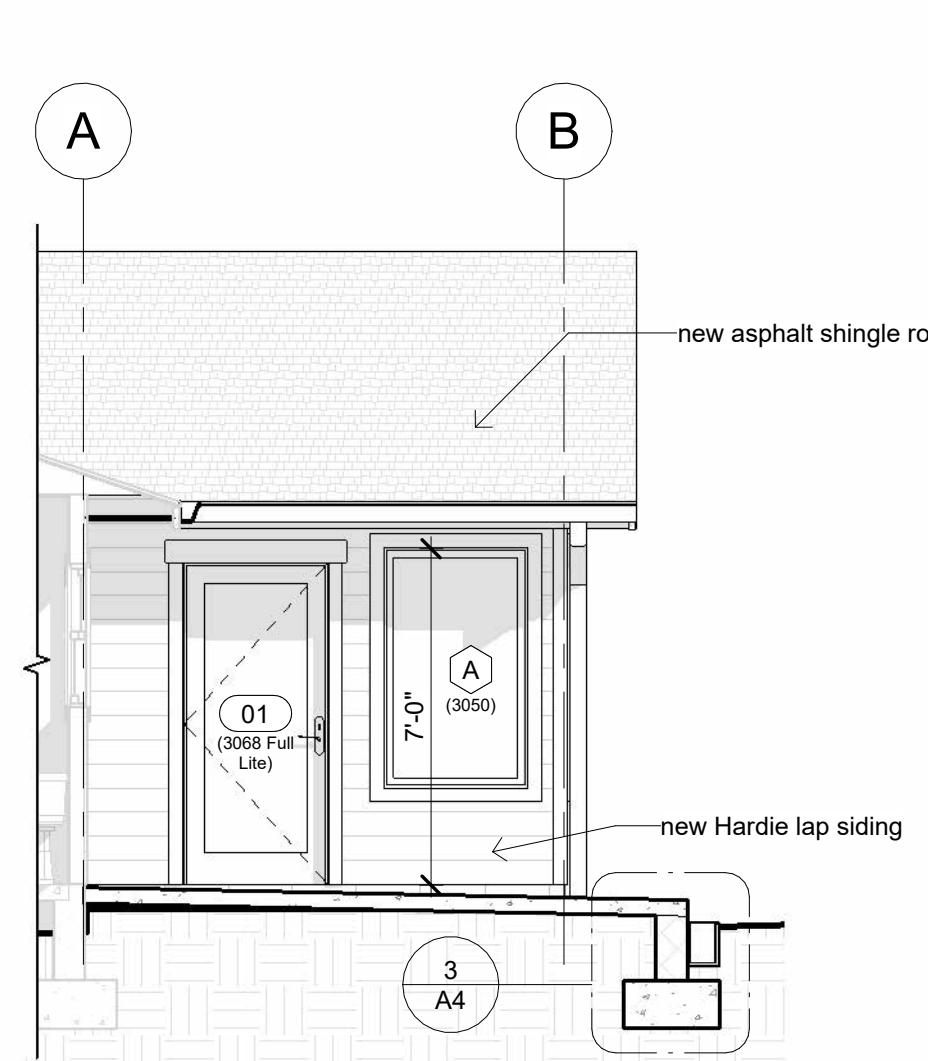


Northeast Elevation Addition

1/4" = 1'-0"

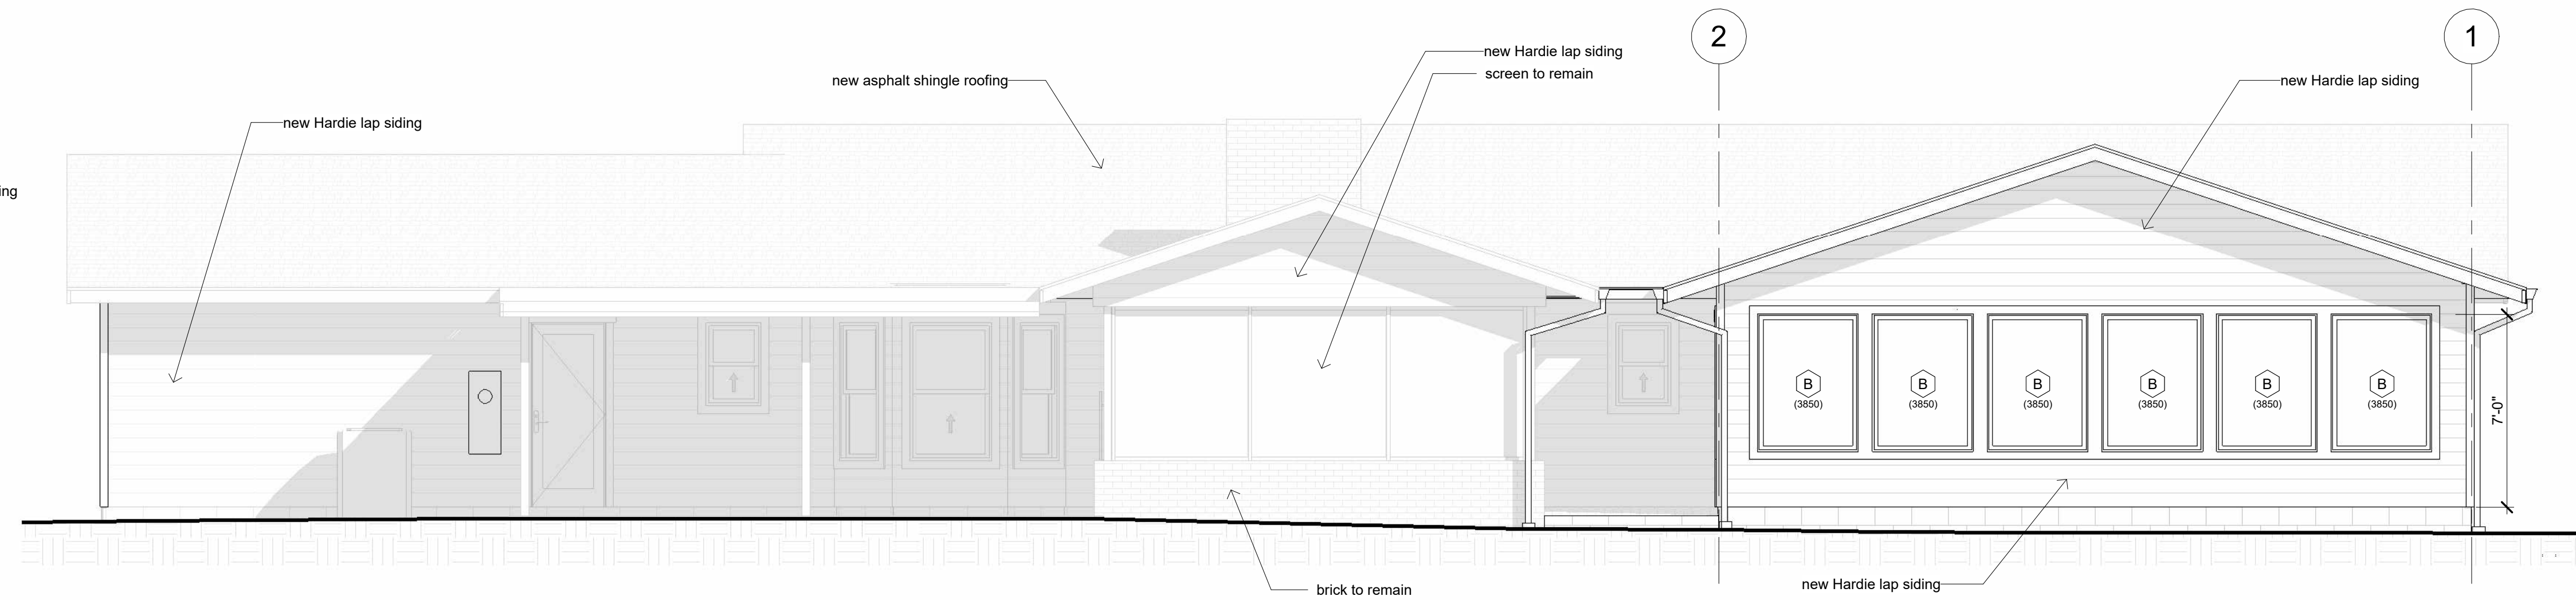

Southwest Elevation

1/4" = 1'-0"

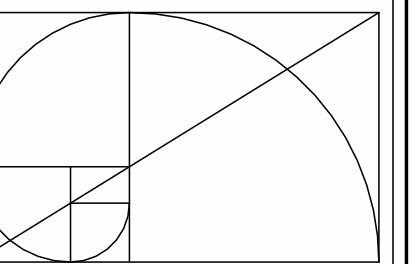

**BOB
HARRIS
DESIGN**

bobharrisdesign.com
bh@bobharrisdesign.com
352-317-6644
2351 SW 5th Avenue

CLIENT

Allison Logan

**Logan Residence
Sunroom Addition**
16910 NE 10th Street
Gainesville, Florida 32609

Revision Date
Number Date

Date: 04/10/2024

Drawn: Bob Harris


Description:

Elevations


SHEET

A2


OF
5

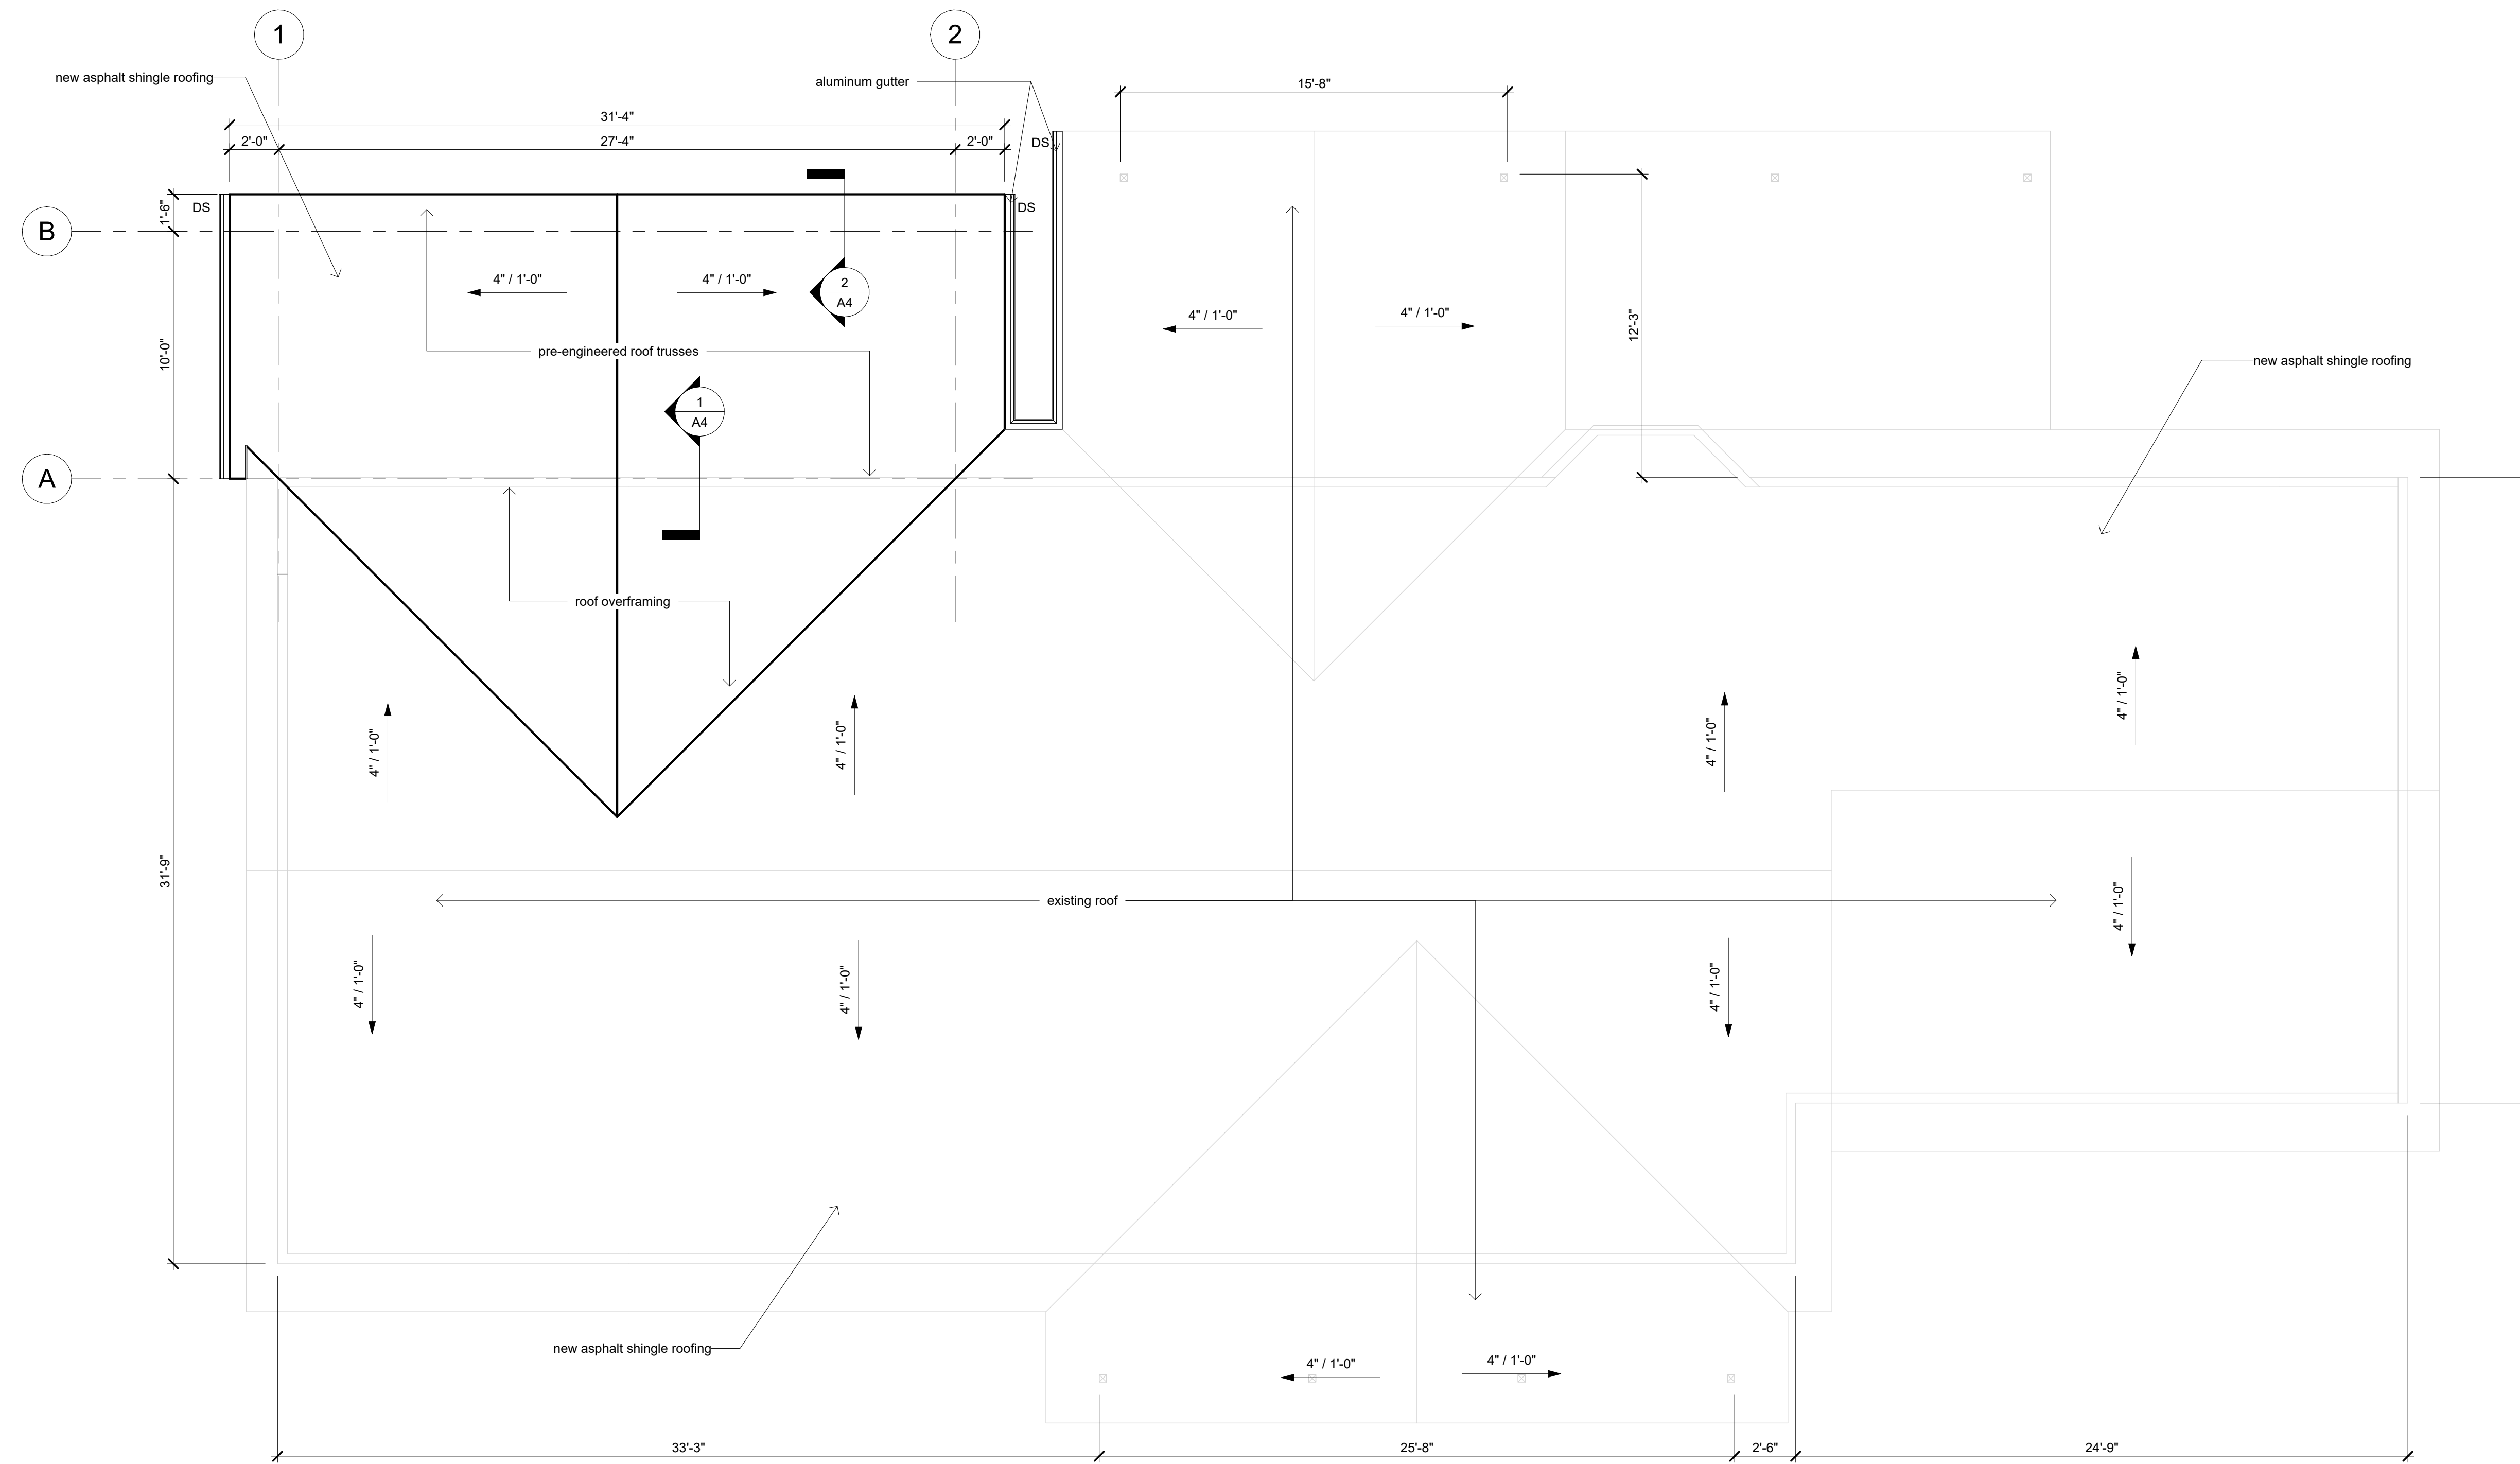

Roof Plan
1/4" = 1'-0"

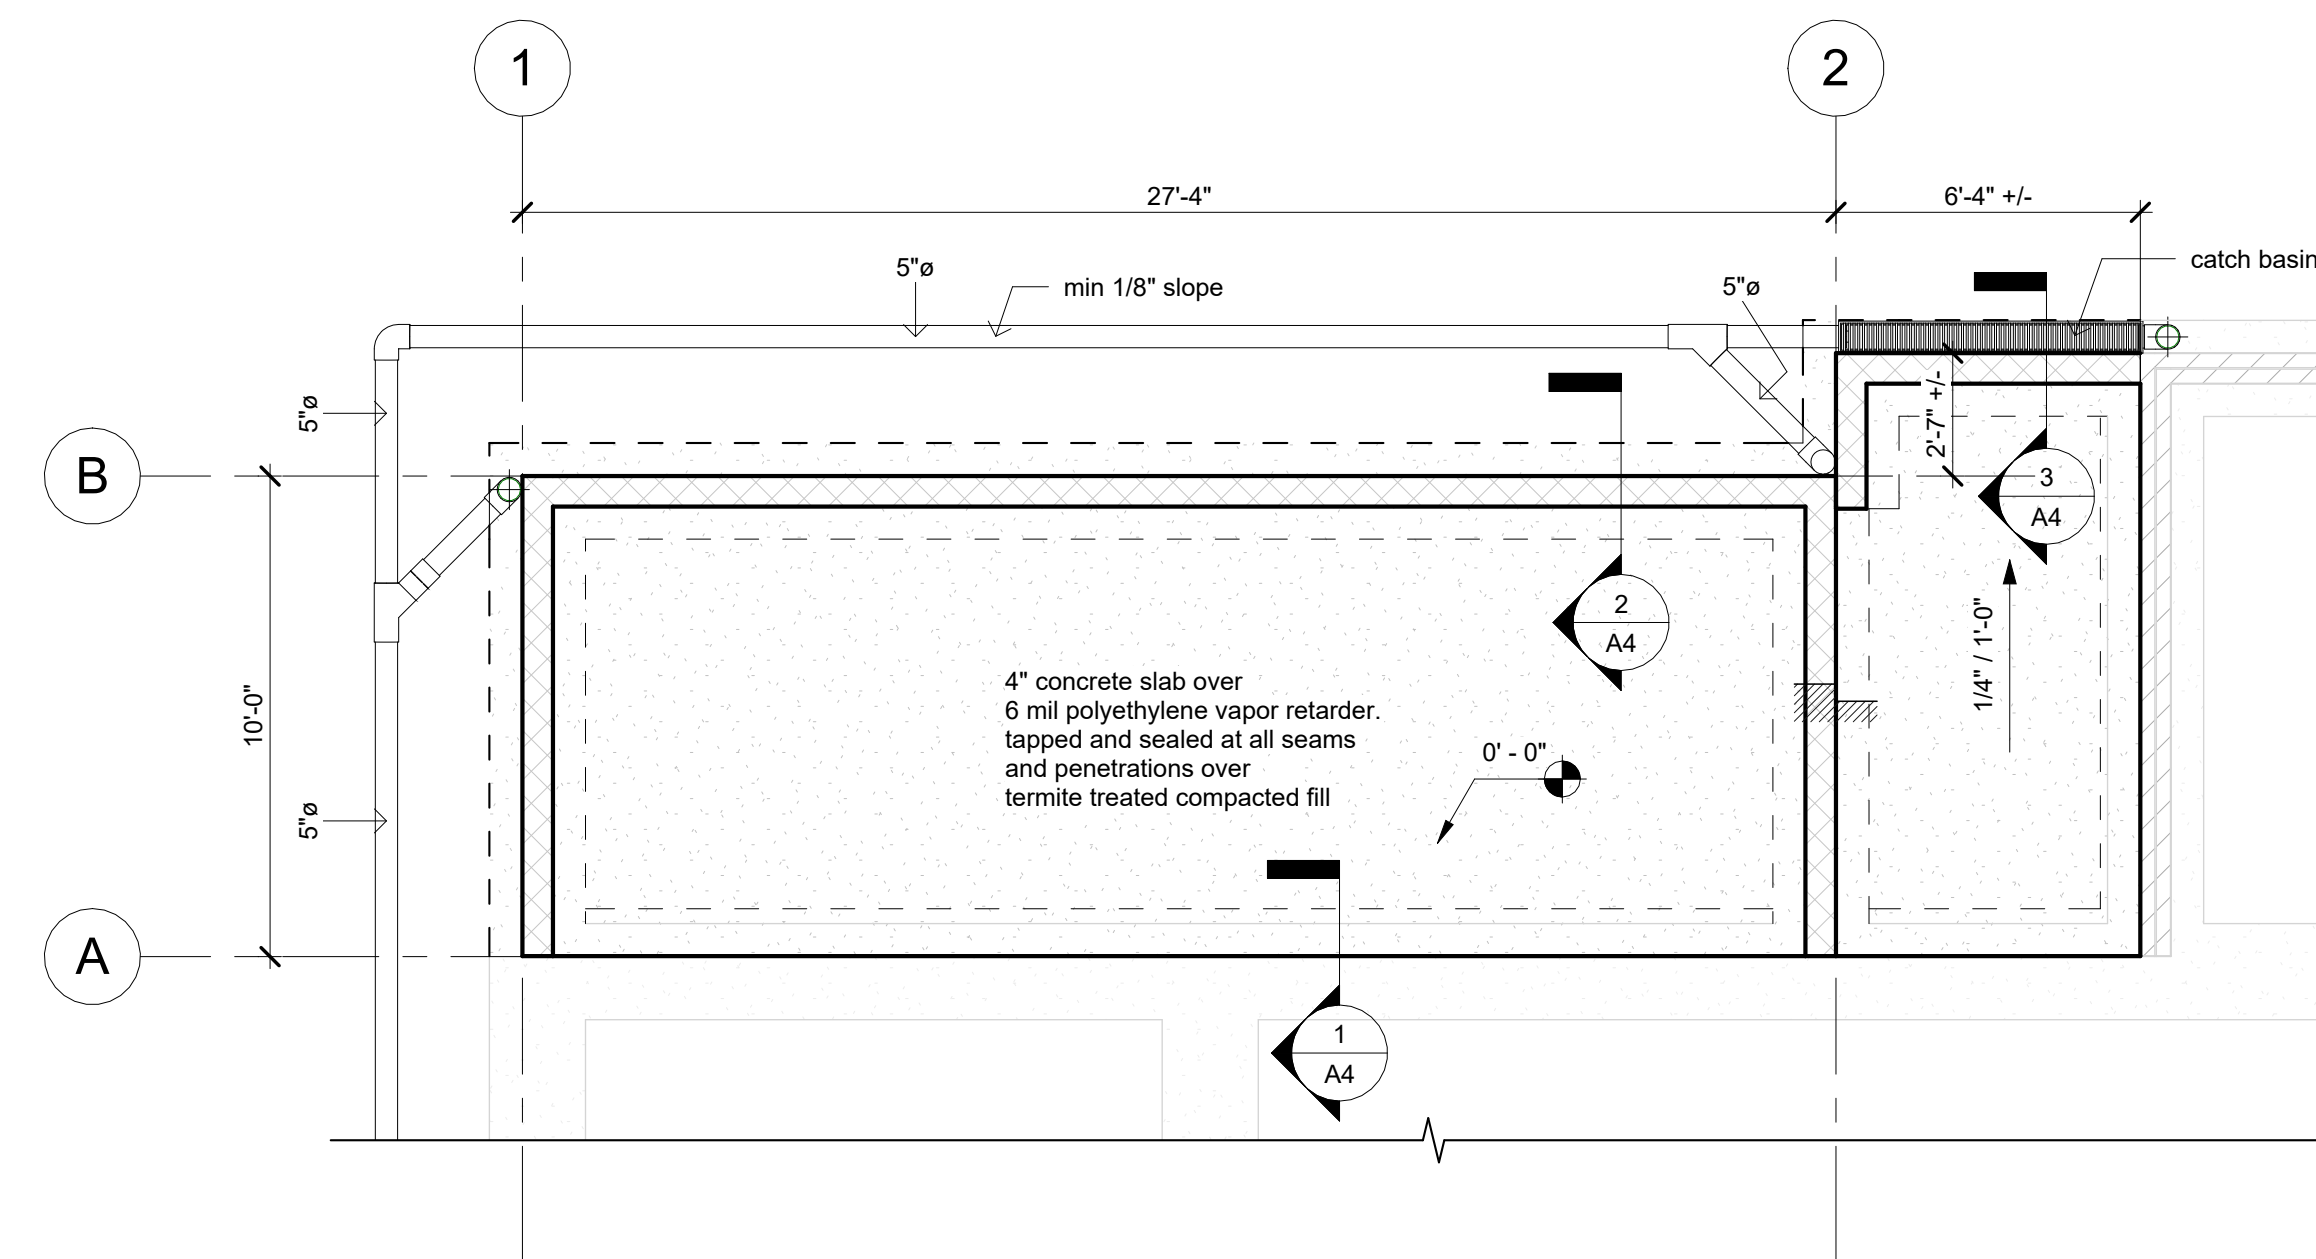

Foundation Plan
1/4" = 1'-0"

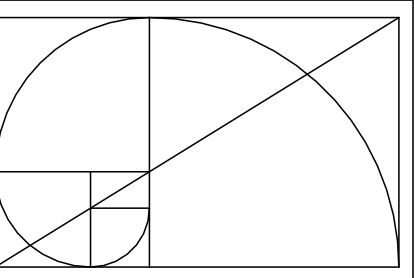

**BOB
HARRIS
DESIGN**

bobharrisdesign.com
bh@bobharrisdesign.com
352-317-6644
2351 SW 5th Avenue


CLIENT
Allison Logan

**Logan Residence
Sunroom Addition**
16910 NE 10th Street
Gainesville, Florida 32609


Revision Number	Date

Date: 04/10/2024
 Drawn: Bob Harris
 Description: Roof & Foundation Plan Plan


SHEET
A3
 OF
 5

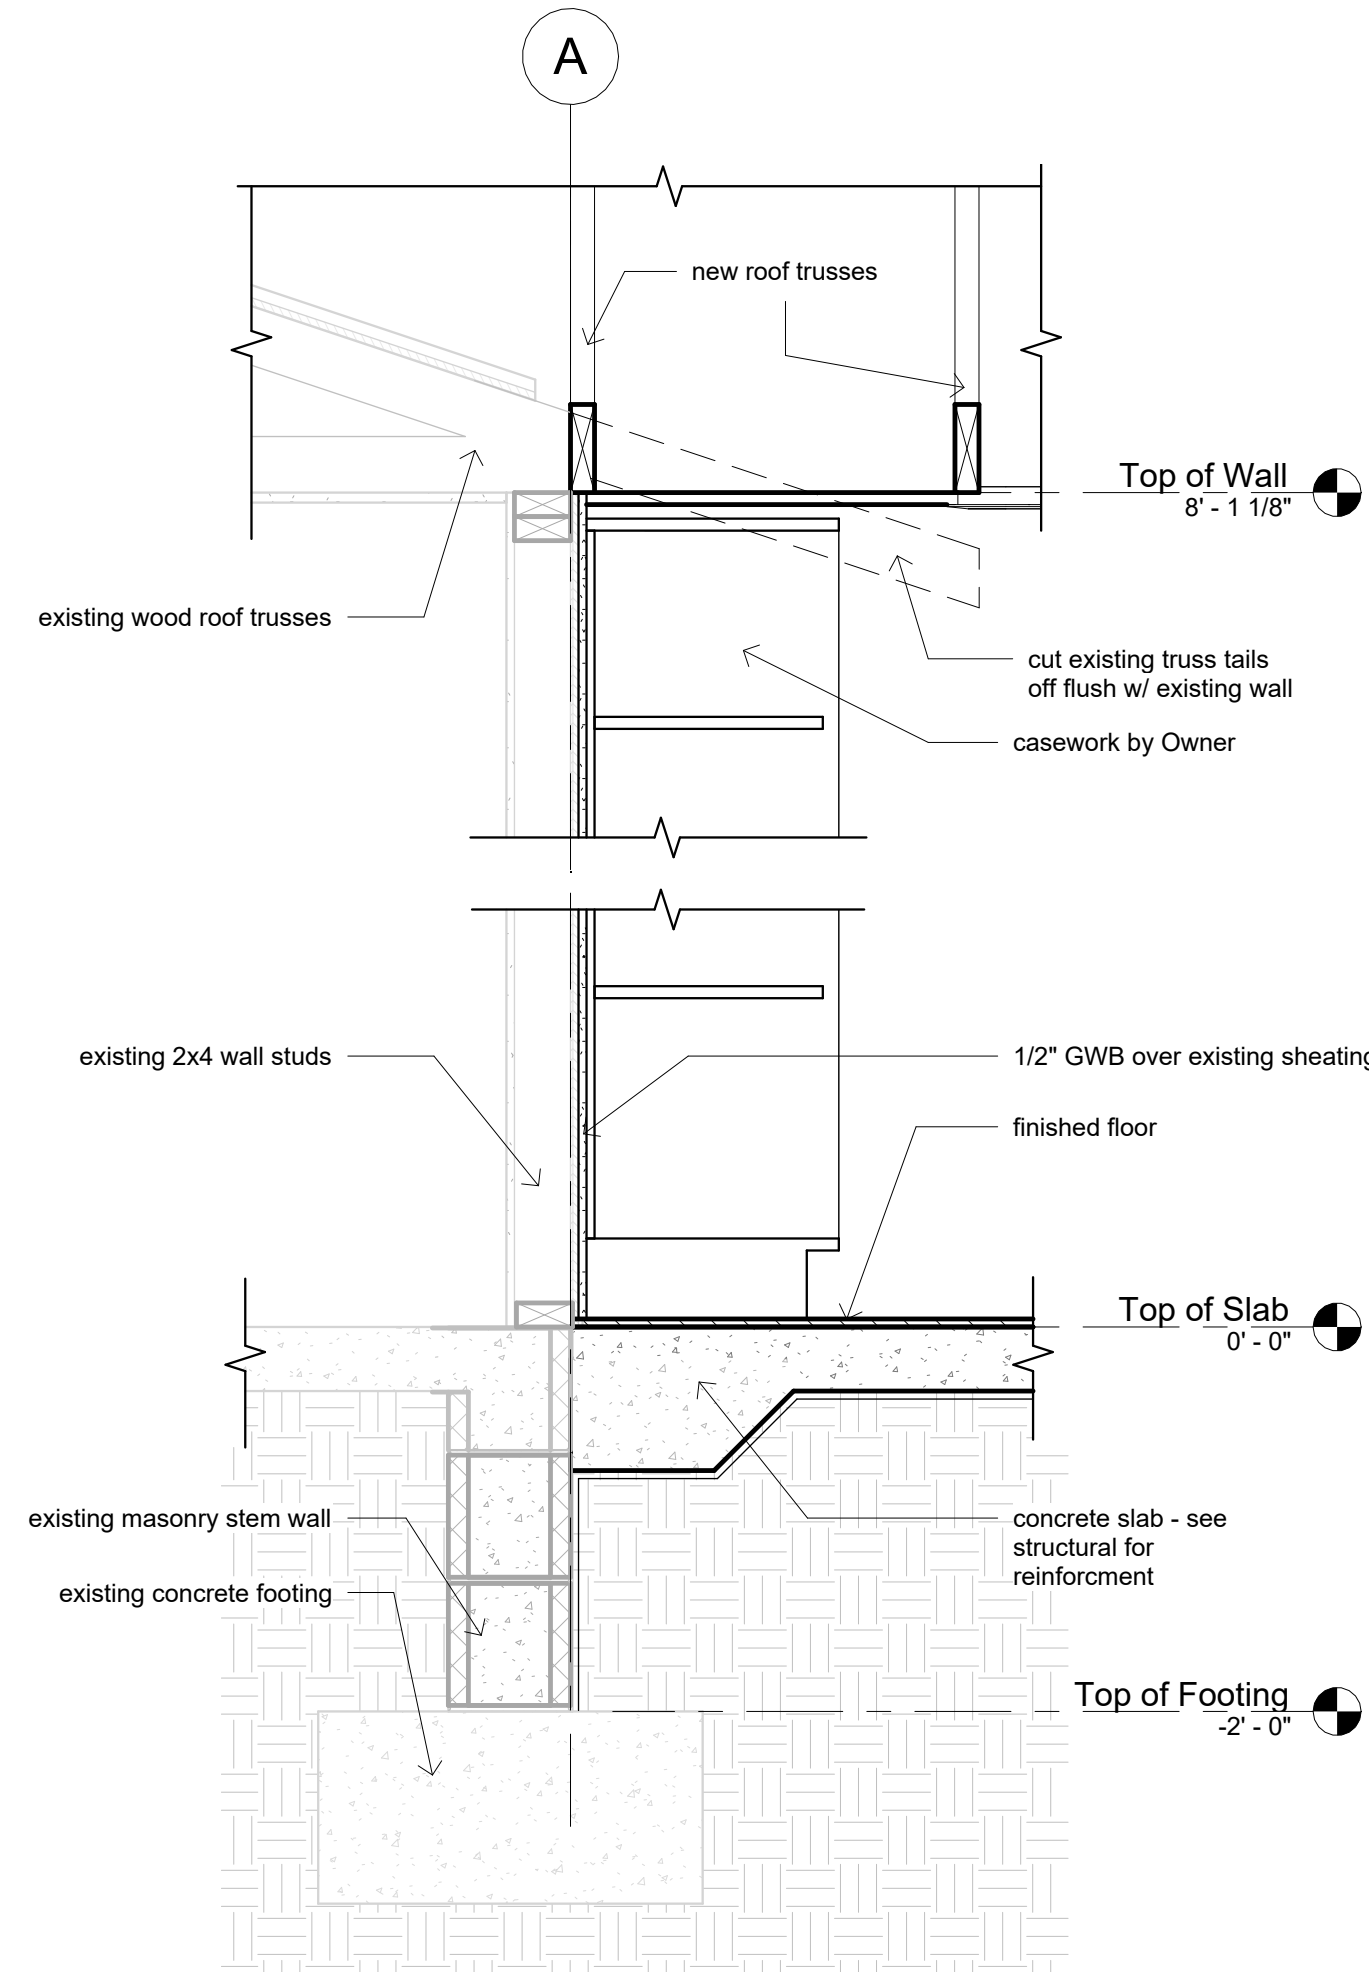


1 Wall Section @ Existing
1" = 1'-0"

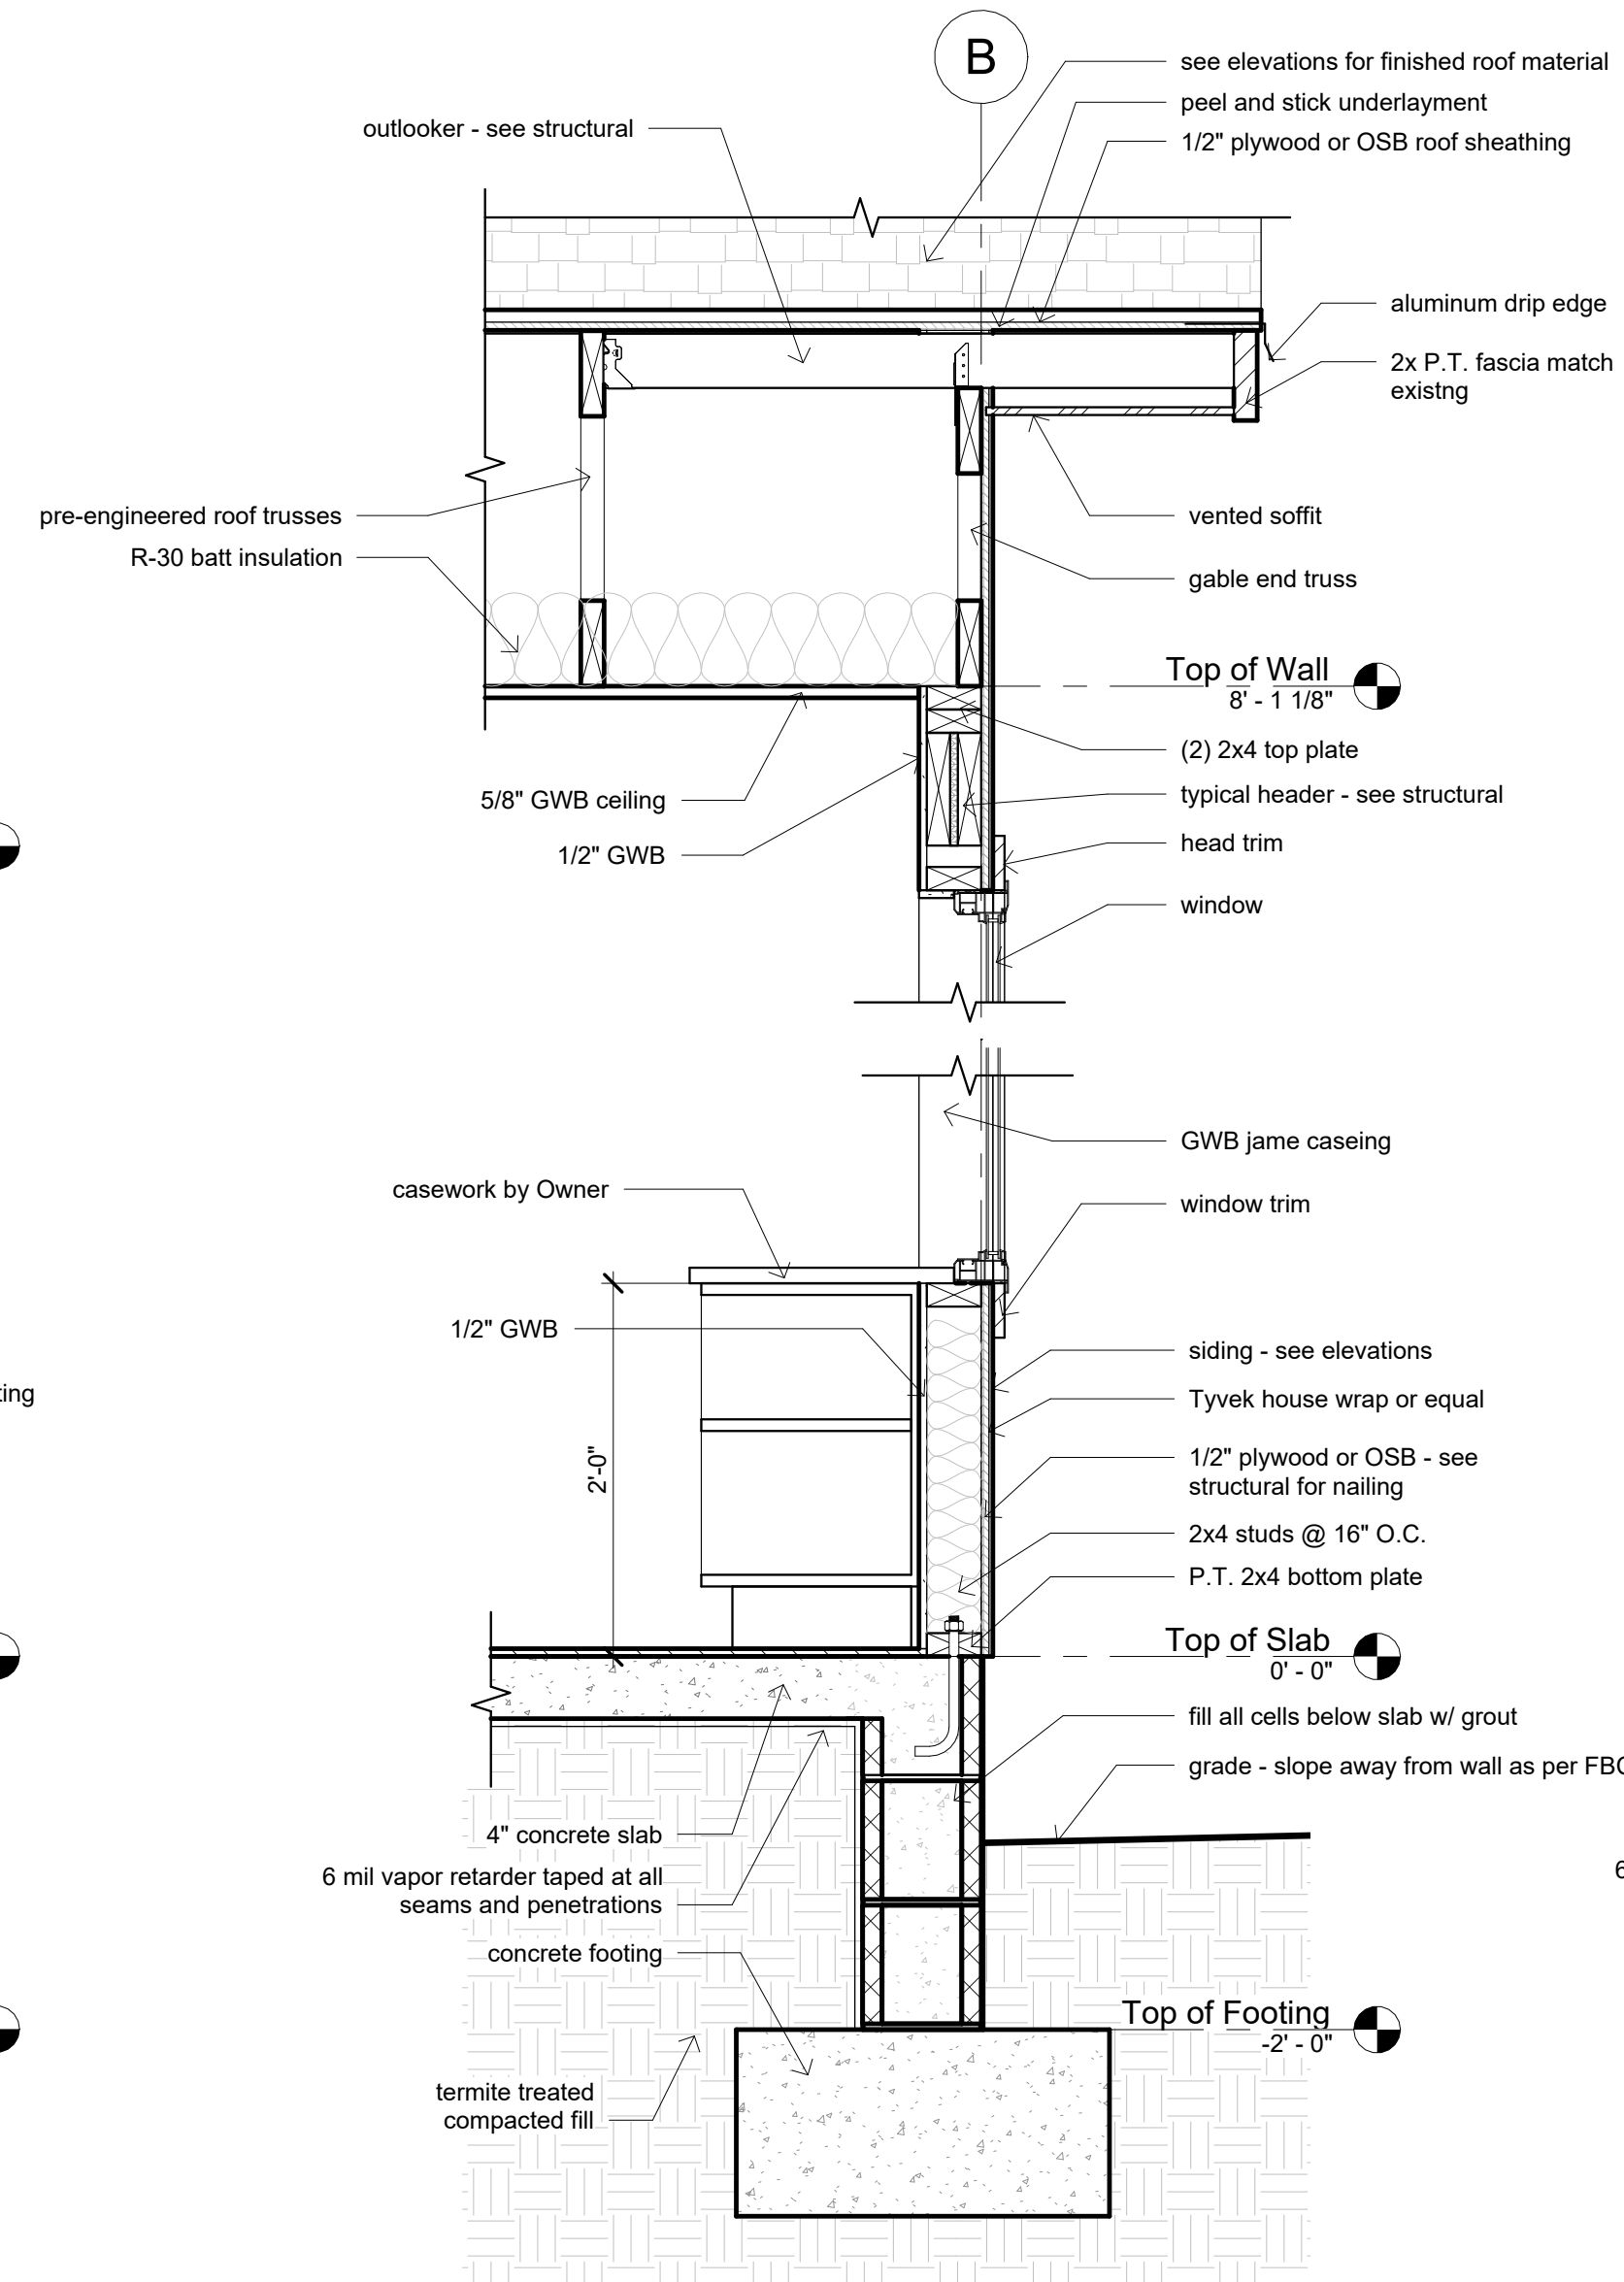

2 Typical Wall Section
1" = 1'-0"

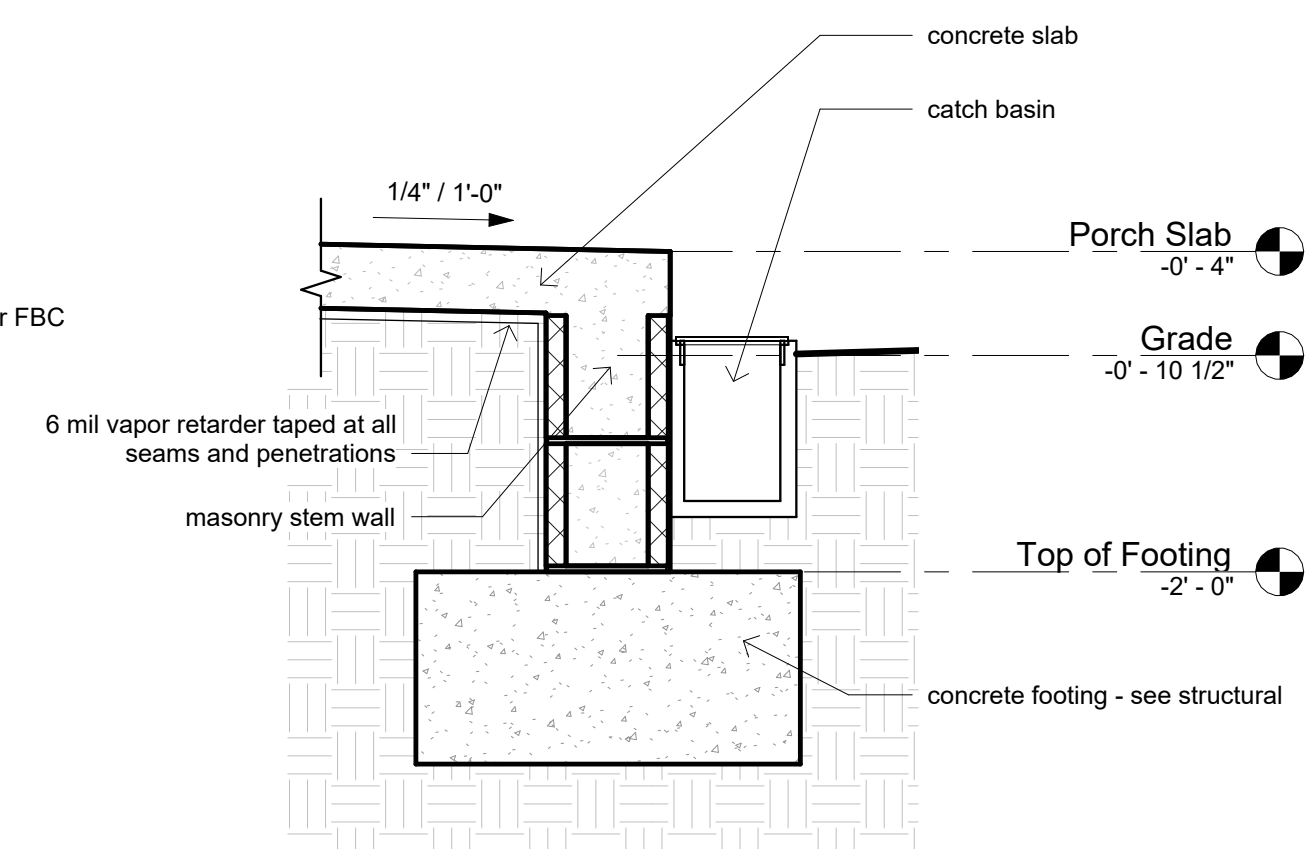

3 Concrete Pad Section
1" = 1'-0"

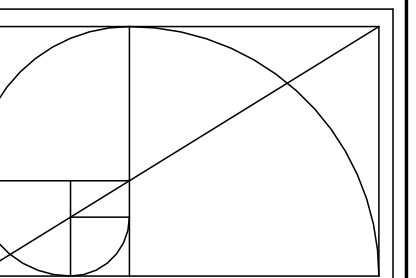

**BOB
HARRIS
DESIGN**

bobharrisdesign.com
bh@bobharrisdesign.com
352-317-6644
2351 SW 5th Avenue

CLIENT
Allison Logan

**Logan Residence
Sunroom Addition**
16910 NE 10th Street
Gainesville, Florida 32609

Revision Date
Number Date

Date:
04/10/2024

Drawn:
Bob Harris

Description:

Details

SHEET

A4

OF
5